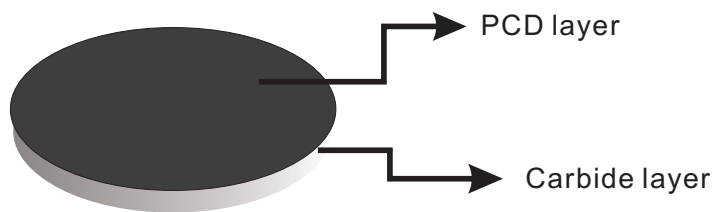


Polycrystalline Diamond (PCD)

TOTIME diamond material is a synthetic diamond sintered under high temperatures and pressures. PCD (Polycrystalline diamond) is ideal for non-ferrous metals and non-metals.

- Applicable for non-ferrous metals, non-metals turning, milling and other various type of cutting.
- Long tool life due to extreme hardness.
- Capable of high cutting speeds which increases cutting productivity.
- Reduced edge build-up allows for high precision cutting.
- Diversified applications for cutting of non-ferrous materials and non-metals.



Recommended Grades

Grade	Grain Size (μm)	Transverse Rupture Strength (Gpa)	Work Material	Features
TDC2000	6	1.7	CFPR Composite Materials	Special blade design, excellent wear resistance.
TDA1000	10	1.4	Medium and Low Si Aluminum Alloy Si<13%	Demonstrates optimum wear and fracture resistance and excellent edge sharpness.
TDA1500	25	1.2	High Si Aluminum Alloy Si>13%	Exhibiting wear and fracture resistance in cutting of aluminum alloy.


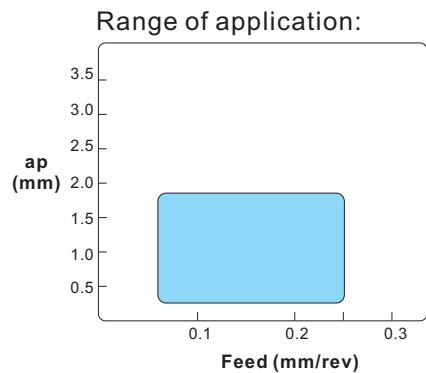
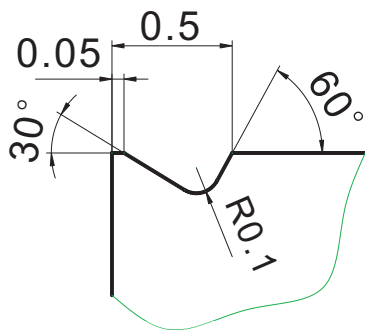
Cutting conditions

Work Material	Grade	Cutting Condition		
		Vc (m/min)	f (mm/rev)	ap(mm)
Medium and Low Si Aluminum Alloy Si<13%	TDA1000	900-3000	0.1-0.4	0.1-0.4
High Si Aluminum Alloy Si>13%	TDA1500	300-700	0.1-0.4	0.1-0.4
Carbon Fiber	TDC2000	200-1500	0.05-0.3	0.1-3.0

PCD Chipbreaker

- Provides excellent chip control in medium finishing and finishing of aluminium alloy.
- Solves chip control problems and dramatically improves work efficiency.
- Achieves long, stable tool life by employing high-toughness grade.


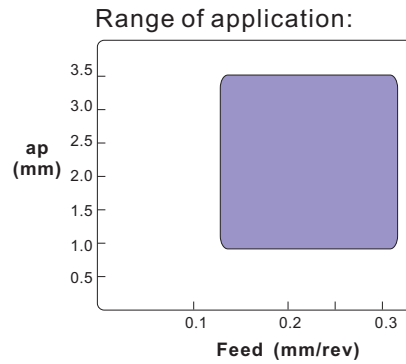
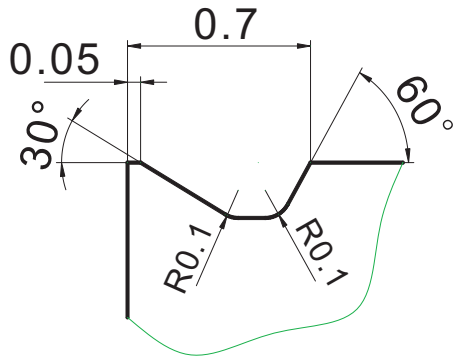
FF Chipbreaker FF Rough/semi-finish slot type



Finely breaks chips in machining cast materials

<p>Machining Details: Internal Boring of Transmission Components</p>	<p>Without chip slot</p>
	<p>With chip slot</p>
<p>Work Material :A6061 Tool No. :2-VCMT110302-FF Cutting Conditions :Vc=200m/min, f=0.20mm/rev ap=0.10mm Wet</p>	

KF Chipbreaker KF Rough/semi-finish chip slot type



Provides good chip control at shallow depths of cut for wrought materials.

Machining Details: Internal Boring of Machine Components		Without chip slot
		With chip slot
Work Material	:ADC12	
Tool No.	:4-TPMT110304-KF	
Cutting Conditions	:Vc=400m/min, f=0.23mm/rev ap=1.20mm Wet	

★ Customer can choose according to exact demand

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

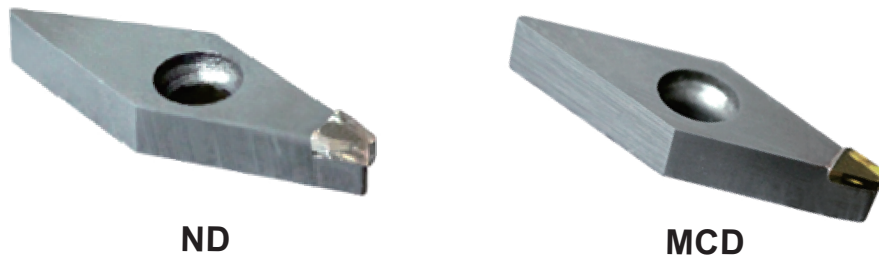
Single Crystal Diamond

Single crystal diamond is considered to be the most ideal tool material for ultra-precision machining, and the tools made have extremely high hardness and wear resistance. Low friction coefficient and high elastic modulus. High thermal conductivity, low thermal expansion coefficient and low affinity with non-ferrous metals. However, the characteristics of materials are also doomed to high experimental cost, high processing difficulty and small processing space.

Classification



Standard inserts



The precision of blade contour can reach 5 μm;
 More sharp edge and longer service life;
 Adopt ISO international standards;
 Mainly including C-type, D-type, V-type, and other series of standard inserts.

Single Crystal Diamond

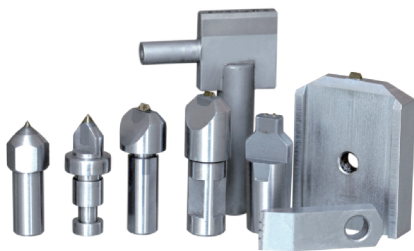


The company has launched diversified diamond single crystal ultra precision machining tool systems, widely used in ultra precision turning, milling, drilling, and nano high polishing table, surface processing. At the same time, the cutting tools can be developed and customized according to the processing needs of customers.




● Milling cutter

- The sharp edge ensures the good quality of the machined surface;
- More excellent wear resistance and longer service life;
- It is suitable for side milling, slot milling, contour milling and spiral interpolation milling of precision parts;
- Specification diameter: $\varnothing 3$ - $\varnothing 20$



● Dresser

- Single / multiple natural diamond finishing tools are used;
- Suitable for all kinds of cylindrical grinding machines, centerless grinding machines, surface grinding machines and special grinding wheels;
- Stable quality, complete specifications and convenient use;
- Longer life and durability.



● Non-standard tool

- The precision of fine grinding edge contour can reach $5 \mu m$;
- Finish grinding the edge contour according to the forming size of the workpiece, and complete the high-precision shape machining at one time.

Insert

External Toolholder

Internal Toolholder

PSC Toolholder







Threading

Parting, Grooving

Miniature Tool

CN Rhombic 80°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	CNGA090302	●	●	●	●	●		—	Φ9.525	3.18	3.18	0.2	
	CNGA090304	●	●	●	●	●		—	Φ9.525	3.18	3.18	0.4	
	CNGA090306	●	●	●	●	●		—	Φ9.525	3.18	3.18	0.6	
	CNGA090308	●	●	●	●	●		—	Φ9.525	3.18	3.18	0.8	
	CNGA09T302	●	●	●	●	●		—	Φ9.525	3.97	3.81	0.2	
	CNGA09T304	●	●	●	●	●		—	Φ9.525	3.97	3.81	0.4	
	CNGA09T306	●	●	●	●	●		—	Φ9.525	3.97	3.81	0.6	
	CNGA09T308	●	●	●	●	●		—	Φ9.525	9.97	3.81	0.8	
	CNGA120402	●	●	●	●	●		—	Φ12.7	4.76	5.16	0.2	
	CNGA120404	●	●	●	●	●		—	Φ12.7	4.76	5.16	0.4	
	CNGA120408	●	●	●	●	●		—	Φ12.7	4.76	5.16	0.8	
	CNGA120412	●	●	●	●	●		—	Φ12.7	4.76	5.16	1.2	

CC Rhombic 80°
Positive 7°

Insert shape	Designation	Material code					Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	CCMW03S102	●	●	●	●	●	—	Φ3.57	1.39	2	0.2	
	CCMW03S104	●	●	●	●	●	—	Φ3.57	1.39	2	0.4	
	CCMW04T002	●	●	●	●	●	—	Φ4.37	1.79	2	0.2	
	CCMW04T004	●	●	●	●	●	—	Φ4.37	1.79	2	0.4	
	CCGW050202	●	●	●	●	●	—	Φ5.56	2.38	2.4	0.2	
	CCGW050204	●	●	●	●	●	—	Φ5.56	2.38	2.4	0.4	
	CCGW050206	●	●	●	●	●	—	Φ5.56	2.38	2.4	0.6	
	CCGT050202	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.4	0.2	
	CCGT050204	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.4	0.4	
	CCGT050206	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.4	0.6	
	CCGW060202	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.2	
	CCGW060204	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.4	
	CCGW060206	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.6	
	CCGW060208	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.8	
	CCGT060202	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.2	
	CCGT060204	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.4	
	CCGT060206	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.6	
	CCGT060208	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.8	
	CCMW080202	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.2	
	CCMW080204	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.4	
	CCMW080206	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.6	
	CCMW080208	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.8	
	CCMT080202	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.2	
	CCMT080204	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.4	
	CCMT080206	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.6	
	CCMT080208	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.8	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder









Threading

Parting, Grooving

Miniature Tool

CC Rhombic 80°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	CCGW09T302	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.2	
	CCGW09T304	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.4	
	CCGW09T306	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.6	
	CCGW09T308	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.8	
	CCGT09T302	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.2	
	CCGT09T304	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.4	
	CCGT09T306	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.6	
	CCGT09T308	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.8	
	CCGW120402	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.2	
	CCGW120404	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.4	
	CCGW120406	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.6	
	CCGW120408	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.8	
	CCGW120412	●	●	●	●	●		—	Φ12.7	4.76	5.5	1.2	
	CCGT120402	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.2	
	CCGT120404	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.4	
	CCGT120406	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.6	
	CCGT120408	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.8	
	CCGT120412	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	1.2	

CP Rhombic 80°
Positive 11°











Insert shape	Designation	Material code					Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	CPGW050202	●	●	●	●	●	—	Φ5.56	2.38	2.4	0.2	
	CPGW050204	●	●	●	●	●	—	Φ5.56	2.38	2.4	0.4	
	CPGW050206	●	●	●	●	●	—	Φ5.56	2.38	2.4	0.6	
	CPGT050202	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.4	0.2	
	CPGT050204	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.4	0.4	
	CPGT050206	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.4	0.6	
	CPGW060202	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.2	
	CPGW060204	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.4	
	CPGW060208	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.8	
	CPGT060202	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.2	
	CPGT060204	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.4	
	CPGT060208	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.8	
	CPGW080202	●	●	●	●	●	—	Φ7.94	2.38	2.8	0.2	
	CPGW080204	●	●	●	●	●	—	Φ7.94	2.38	2.8	0.4	
	CPGW080206	●	●	●	●	●	—	Φ7.94	2.38	2.8	0.6	
	CPGW080208	●	●	●	●	●	—	Φ7.94	2.38	2.8	0.8	
	CPGT080202	●	●	●	●	●	3°~5°	Φ7.94	2.38	2.8	0.2	
	CPGT080204	●	●	●	●	●	3°~5°	Φ7.94	2.38	2.8	0.4	
	CPGT080206	●	●	●	●	●	3°~5°	Φ7.94	2.38	2.8	0.6	
	CPGT080208	●	●	●	●	●	3°~5°	Φ7.94	2.38	2.8	0.8	
	CPGW090302	●	●	●	●	●	—	Φ9.525	3.18	4.4	0.2	
	CPGW090304	●	●	●	●	●	—	Φ9.525	3.18	4.4	0.4	
	CPGW090306	●	●	●	●	●	—	Φ9.525	3.18	4.4	0.6	
	CPGW090308	●	●	●	●	●	—	Φ9.525	3.18	4.4	0.8	

Insert







External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

CP Rhombic 80°
Positive 11°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	CPGT090302	●	●	●	●	●		5°~10°	Φ9.525	3.18	4.4	0.2	
	CPGT090304	●	●	●	●	●		5°~10°	Φ9.525	3.18	4.4	0.4	
	CPGT090306	●	●	●	●	●		5°~10°	Φ9.525	3.18	4.4	0.6	
	CPGT090308	●	●	●	●	●		5°~10°	Φ9.525	3.18	4.4	0.8	
	CPGW09T302	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.2	
	CPGW09T304	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.4	
	CPGW09T306	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.6	
	CPGW09T308	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.8	
	CPGT09T302	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.2	
	CPGT09T304	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.4	
	CPGT09T306	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.6	
	CPGT09T308	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.8	
	CPGW120402	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.2	
	CPGW120404	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.4	
	CPGW120408	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.8	
	CPGW120410	●	●	●	●	●		—	Φ12.7	4.76	5.5	1.0	
	CPGW120412	●	●	●	●	●		—	Φ12.7	4.76	5.5	1.2	
	CPGT120402	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.2	
	CPGT120404	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.4	
	CPGT120408	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.8	
	CPGT120410	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	1.0	
	CPGT120412	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	1.2	

DN Rhombic 55°
Negative

Insert shape	Designation	Material code						rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	DNGA110402	●	●	●	●	●		—	Φ9.525	4.76	3.8	0.2	
	DNGA110404	●	●	●	●	●		—	Φ9.525	4.76	3.8	0.4	
	DNGA110406	●	●	●	●	●		—	Φ9.525	4.76	3.8	0.6	
	DNGA110408	●	●	●	●	●		—	Φ9.525	4.76	3.8	0.8	
	DNGA150402	●	●	●	●	●		—	Φ12.7	4.76	5.16	0.2	
	DNGA150404	●	●	●	●	●		—	Φ12.7	4.76	5.16	0.4	
	DNGA150408	●	●	●	●	●		—	Φ12.7	4.76	5.16	0.8	
	DNGA150410	●	●	●	●	●		—	Φ12.7	4.76	5.16	1.0	
	DNGA150412	●	●	●	●	●		—	Φ12.7	4.76	5.16	1.2	
	DNGA150604	●	●	●	●	●		—	Φ12.7	6.35	5.16	0.4	
	DNGA150608	●	●	●	●	●		—	Φ12.7	6.35	5.16	0.8	
	DNGA150610	●	●	●	●	●		—	Φ12.7	6.35	5.16	1.0	
	DNGA150612	●	●	●	●	●		—	Φ12.7	6.35	5.16	1.2	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder

Threading

Parting, Grooving











Miniature Tool

DC Rhombic 55°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting ,Grooving
Miniature Tool

Insert shape	Designation	Material code					Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	DCGW070202	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.2	
	DCGW070204	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.4	
	DCGW070206	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.6	
	DCGW070208	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.8	
	DCGT070202	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.2	
	DCGT070204	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.4	
	DCGT070206	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.6	
	DCGT070208	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.8	
	DCGW090202	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.2	
	DCGW090204	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.4	
	DCGW090206	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.6	
	DCGW090208	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.8	
	DCGT090202	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.2	
	DCGT090204	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.4	
	DCGT090206	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.6	
	DCGT090208	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.8	
	DCGW110302	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.2	
	DCGW110304	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.4	
	DCGW110308	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.8	
	DCGT110302	●	●	●	●	●	5°~10°	Φ9.525	3.18	3.4	0.2	
	DCGT110304	●	●	●	●	●	5°~10°	Φ9.525	3.18	3.4	0.4	
	DCGT110308	●	●	●	●	●	5°~10°	Φ9.525	3.18	3.4	0.8	
	DCGW11T302	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.2	
	DCGW11T304	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.4	
	DCGW11T306	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.6	
	DCGW11T308	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.8	

DC Rhombic 55°
Positive 7°

Insert shape	Designation	Material code						Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	DCGT11T302	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.2	
	DCGT11T304	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.4	
	DCGT11T306	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.6	
	DCGT11T308	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.8	
	DCGW110402	●	●	●	●	●		—	Φ9.525	4.76	4.5	0.2	
	DCGW110404	●	●	●	●	●		—	Φ9.525	4.76	4.5	0.4	
	DCGW110406	●	●	●	●	●		—	Φ9.525	4.76	4.5	0.6	
	DCGT110402	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.5	0.2	
	DCGT110404	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.5	0.4	
	DCGT110406	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.5	0.6	
	DCGT110408	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.5	0.8	
	DCGW150404	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.4	
	DCGW150406	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.6	
	DCGW150408	●	●	●	●	●		—	Φ12.7	4.76	5.5	0.8	
	DCGW150410	●	●	●	●	●		—	Φ12.7	4.76	5.5	1.0	
	DCGW150412	●	●	●	●	●		—	Φ12.7	4.76	5.5	1.2	
	DCGW150416	●	●	●	●	●		—	Φ12.7	4.76	5.5	1.6	
	DCGT150404	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.4	
	DCGT150406	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.6	
	DCGT150408	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	0.8	
	DCGT150410	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	1.0	
	DCGT150412	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	1.2	
	DCGT150416	●	●	●	●	●		5°~10°	Φ12.7	4.76	5.5	1.6	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder













Threading

Parting / Grooving

Miniature Tool

DP Rhombic 55°
Positive 11°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting ,Grooving
Miniature Tool

Insert shape	Designation	Material code					Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	DPGW070202	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.2	
	DPGW070204	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.4	
	DPGW070206	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.6	
	DPGW070208	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.8	
	DPGT070202	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.2	
	DPGT070204	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.4	
	DPGT070206	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.6	
	DPGT070208	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.8	
	DPGW090202	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.2	
	DPGW090204	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.4	
	DPGW090206	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.6	
	DPGW090208	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.8	
	DPGT090202	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.2	
	DPGT090204	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.4	
	DPGT090206	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.6	
	DPGT090208	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.8	
	DPGW110302	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.2	
	DPGW110304	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.4	
	DPGW110306	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.6	
	DPGW110308	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.8	
	DPGT110302	●	●	●	●	●	5°~10°	Φ9.525	3.18	3.4	0.2	
	DPGT110304	●	●	●	●	●	5°~10°	Φ9.525	3.18	3.4	0.4	
	DPGT110306	●	●	●	●	●	5°~10°	Φ9.525	3.18	3.4	0.6	
	DPGT110308	●	●	●	●	●	5°~10°	Φ9.525	3.18	3.4	0.8	

DP Rhombic 55°
Positive 11°

Insert shape	Designation	Material code					Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	DPGW11T302	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.2	
	DPGW11T304	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.4	
	DPGW11T306	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.6	
	DPGW11T308	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.8	
	DPGT11T302	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.2	
	DPGT11T304	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.4	
	DPGT11T306	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.6	
	DPGT11T308	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.8	
	DPGW110402	●	●	●	●	●	—	Φ9.525	4.76	4.4	0.2	
	DPGW110404	●	●	●	●	●	—	Φ9.525	4.76	4.4	0.4	
	DPGW110406	●	●	●	●	●	—	Φ9.525	4.76	4.4	0.6	
	DPGW110408	●	●	●	●	●	—	Φ9.525	4.76	4.4	0.8	
	DPGT110402	●	●	●	●	●	5°~10°	Φ9.525	4.76	4.5	0.2	
	DPGT110404	●	●	●	●	●	5°~10°	Φ9.525	4.76	4.5	0.4	
	DPGT110406	●	●	●	●	●	5°~10°	Φ9.525	4.76	4.5	0.6	
	DPGT110408	●	●	●	●	●	5°~10°	Φ9.525	4.76	4.5	0.8	
	DPGW150404	●	●	●	●	●	—	Φ12.7	4.76	5.5	0.4	
	DPGW150406	●	●	●	●	●	—	Φ12.7	4.76	5.5	0.6	
	DPGW150408	●	●	●	●	●	—	Φ12.7	4.76	5.5	0.8	
	DPGW150410	●	●	●	●	●	—	Φ12.7	4.76	5.5	1.0	
	DPGW150412	●	●	●	●	●	—	Φ12.7	4.76	5.5	1.2	
	DPGT150404	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	0.4	
	DPGT150406	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	0.6	
	DPGT150408	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	0.8	
	DPGT150410	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	1.0	
	DPGT150412	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	1.2	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder



Threading

Parting, Grooving

Miniature Tool

VN Rhombic 35°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	VNGA160402	●	●	●	●	●		—	Φ9.525	4.76	3.8	0.2	
	VNGA160404	●	●	●	●	●		—	Φ9.525	4.76	3.8	0.4	
	VNGA160408	●	●	●	●	●		—	Φ9.525	4.76	3.8	0.8	
	VNGA160410	●	●	●	●	●		—	Φ9.525	4.76	3.8	1.0	
	VNGA160412	●	●	●	●	●		—	Φ9.525	4.76	3.8	1.2	













VB Rhombic 35°
Positive 5°

Insert shape	Designation	Material code						Rake angle (γ_0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd_1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	VBGW110302	●	●	●	●	●	—	$\Phi 6.35$	3.18	2.8	0.2		
	VBGW110304	●	●	●	●	●	—	$\Phi 6.35$	3.18	2.8	0.4		
	VBGW110306	●	●	●	●	●	—	$\Phi 6.35$	3.18	2.8	0.6		
	VBGW110308	●	●	●	●	●	—	$\Phi 6.35$	3.18	2.8	0.8		
	VBGT110302	●	●	●	●	●	3°~5°	$\Phi 6.35$	3.18	2.8	0.2		
	VBGT110304	●	●	●	●	●	3°~5°	$\Phi 6.35$	3.18	2.8	0.4		
	VBGT110306	●	●	●	●	●	3°~5°	$\Phi 6.35$	3.18	2.8	0.6		
	VBGT110308	●	●	●	●	●	3°~5°	$\Phi 6.35$	3.18	2.8	0.8		
	VBGW160404	●	●	●	●	●	—	$\Phi 9.525$	4.76	4.4	0.4		
	VBGW160406	●	●	●	●	●	—	$\Phi 9.525$	4.76	4.4	0.6		
	VBGW160408	●	●	●	●	●	—	$\Phi 9.525$	4.76	4.4	0.8		
	VBGW160410	●	●	●	●	●	—	$\Phi 9.525$	4.76	4.4	1.0		
	VBGW160412	●	●	●	●	●	—	$\Phi 9.525$	4.76	4.4	1.2		
	VBGT160404	●	●	●	●	●	5°~10°	$\Phi 9.525$	4.76	4.4	0.4		
	VBGT160406	●	●	●	●	●	5°~10°	$\Phi 9.525$	4.76	4.4	0.6		
	VBGT160408	●	●	●	●	●	5°~10°	$\Phi 9.525$	4.76	4.4	0.8		
	VBGT160410	●	●	●	●	●	5°~10°	$\Phi 9.525$	4.76	4.4	1.0		
	VBGT160412	●	●	●	●	●	5°~10°	$\Phi 9.525$	4.76	4.4	1.2		









Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

VC Rhombic 35°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	VCGW080202	●	●	●	●	●		—	Φ4.76	2.38	2.3	0.2	
	VCGW080204	●	●	●	●	●		—	Φ4.76	2.38	2.3	0.4	
	VCGW080208	●	●	●	●	●		—	Φ4.76	2.38	2.3	0.8	
	VCGT080202	●	●	●	●	●		3°~5°	Φ4.76	2.38	2.3	0.2	
	VCGT080204	●	●	●	●	●		3°~5°	Φ4.76	2.38	2.3	0.4	
	VCGT080208	●	●	●	●	●		3°~5°	Φ4.76	2.38	2.3	0.8	
	VCGW110302	●	●	●	●	●		—	Φ6.35	3.18	2.8	0.2	
	VCGW110304	●	●	●	●	●		—	Φ6.35	3.18	2.8	0.4	
	VCGW110308	●	●	●	●	●		—	Φ6.35	3.18	2.8	0.8	
	VCGT110302	●	●	●	●	●		3°~5°	Φ6.35	3.18	2.8	0.2	
	VCGT110304	●	●	●	●	●		3°~5°	Φ6.35	3.18	2.8	0.4	
	VCGT110308	●	●	●	●	●		3°~5°	Φ6.35	3.18	2.8	0.8	
	VCGW160404	●	●	●	●	●		—	Φ9.525	4.76	4.4	0.4	
	VCGW160408	●	●	●	●	●		—	Φ9.525	4.76	4.4	0.8	
	VCGW160410	●	●	●	●	●		—	Φ9.525	4.76	4.4	1.0	
	VCGW160412	●	●	●	●	●		—	Φ9.525	4.76	4.4	1.2	
	VCGT160404	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	0.4	
	VCGT160408	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	0.8	
	VCGT160410	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	1.0	
	VCGT160412	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	1.2	

VP Rhombic 35°
Positive 11°

Insert shape	Designation	Material code						Rake angle (γ_0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd_1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	VPGW080202	●	●	●	●	●	—	$\Phi 4.76$	2.38	2.3	0.2		
	VPGW080204	●	●	●	●	●	—	$\Phi 4.76$	2.38	2.3	0.4		
	VPGW080208	●	●	●	●	●	—	$\Phi 4.76$	2.38	2.3	0.8		
	VPGT080202	●	●	●	●	●	3°~5°	$\Phi 4.76$	2.38	2.3	0.2		
	VPGT080204	●	●	●	●	●	3°~5°	$\Phi 4.76$	2.38	2.3	0.4		
	VPGT080208	●	●	●	●	●	3°~5°	$\Phi 4.76$	2.38	2.3	0.8		
	VPGW110302	●	●	●	●	●	—	$\Phi 6.35$	3.18	2.8	0.2		
	VPGW110304	●	●	●	●	●	—	$\Phi 6.35$	3.18	2.8	0.4		
	VPGW110308	●	●	●	●	●	—	$\Phi 6.35$	3.18	2.8	0.8		
	VPGT110302	●	●	●	●	●	3°~5°	$\Phi 6.35$	3.18	2.8	0.2		
	VPGT110304	●	●	●	●	●	3°~5°	$\Phi 6.35$	3.18	2.8	0.4		
	VPGT110308	●	●	●	●	●	3°~5°	$\Phi 6.35$	3.18	2.8	0.8		

Insert

External Toolholder

Internal Toolholder

PSC Toolholder









Threading

Parting, Grooving

Miniature Tool

TN Triangular 60°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	TNGA110302	●	●	●	●	●	—	Φ6.35	3.18	2.3	0.2	
	TNGA110304	●	●	●	●	●	—	Φ6.35	3.18	2.3	0.4	
	TNGA110308	●	●	●	●	●	—	Φ6.35	3.18	2.3	0.8	
	TNGA160404	●	●	●	●	●	—	Φ9.525	4.76	3.8	0.4	
	TNGA160408	●	●	●	●	●	—	Φ9.525	4.76	3.8	0.8	
	TNGA160412	●	●	●	●	●	—	Φ9.525	4.76	3.8	1.2	
	TNGA160416	●	●	●	●	●	—	Φ9.525	4.76	3.8	1.6	
	TNGA220408	●	●	●	●	●	—	Φ12.7	4.76	5.16	0.8	
	TNGA220412	●	●	●	●	●	—	Φ12.7	4.76	5.16	1.2	
	TNGA220416	●	●	●	●	●	—	Φ12.7	4.76	5.16	1.6	
	TNGA270608	●	●	●	●	●	—	Φ15.875	6.35	6.35	0.8	
	TNGA270612	●	●	●	●	●	—	Φ15.875	6.35	6.35	1.2	
	TNGA270616	●	●	●	●	●	—	Φ15.875	6.35	6.35	1.6	

TC Triangular 60°
Positive 7°

Insert shape	Designation	Material code					Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	TCGW060102	●	●	●	●	●	—	Φ3.97	1.59	2.2	0.2	
	TCGW060104	●	●	●	●	●	—	Φ3.97	1.59	2.2	0.4	
	TCGW06T102	●	●	●	●	●	—	Φ3.97	1.98	2.2	0.2	
	TCGW06T104	●	●	●	●	●	—	Φ3.97	1.98	2.2	0.4	
	TCGW060202	●	●	●	●	●	—	Φ3.97	2.38	2.2	0.2	
	TCGW060204	●	●	●	●	●	—	Φ3.97	2.38	2.2	0.4	
	TCGT060202	●	●	●	●	●	3°~5°	Φ3.97	2.38	2.2	0.2	
	TCGT060204	●	●	●	●	●	3°~5°	Φ3.97	2.38	2.2	0.4	
	TCGW080202	●	●	●	●	●	—	Φ4.76	2.38	2.3	0.2	
	TCGW080204	●	●	●	●	●	—	Φ4.76	2.38	2.3	0.4	
	TCGW080206	●	●	●	●	●	—	Φ4.76	2.38	2.3	0.6	
	TCGT080202	●	●	●	●	●	3°~5°	Φ4.76	2.38	2.3	0.2	
	TCGT080204	●	●	●	●	●	3°~5°	Φ4.76	2.38	2.3	0.4	
	TCGT080206	●	●	●	●	●	3°~5°	Φ4.76	2.38	2.3	0.6	
	TCGW090202	●	●	●	●	●	—	Φ5.56	2.38	2.3	0.2	
	TCGW090204	●	●	●	●	●	—	Φ5.56	2.38	2.3	0.4	
	TCGW090208	●	●	●	●	●	—	Φ5.56	2.38	2.3	0.8	
	TCGT090202	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.3	0.2	
	TCGT090204	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.3	0.4	
	TCGT090208	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.3	0.8	
	TCGW110202	●	●	●	●	●	—	Φ6.35	2.38	2.3	0.2	
	TCGW110204	●	●	●	●	●	—	Φ6.35	2.38	2.3	0.4	
	TCGW110208	●	●	●	●	●	—	Φ6.35	2.38	2.3	0.8	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder

Threading

Parting · Grooving

Miniature Tool

TC Triangular 60°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	TCGT110202	●	●	●	●	●		3°~5°	Φ6.35	2.38	2.8	0.2	
	TCGT110204	●	●	●	●	●		3°~5°	Φ6.35	2.38	2.8	0.4	
	TCGT110208	●	●	●	●	●		3°~5°	Φ6.35	2.38	2.8	0.8	
	TCGW110302	●	●	●	●	●		—	Φ6.35	3.18	2.8	0.2	
	TCGW110304	●	●	●	●	●		—	Φ6.35	3.18	2.8	0.4	
	TCGW110308	●	●	●	●	●		—	Φ6.35	3.18	2.8	0.8	
	TCGT110302	●	●	●	●	●		3°~5°	Φ6.35	3.18	2.8	0.2	
	TCGT110304	●	●	●	●	●		3°~5°	Φ6.35	3.18	2.8	0.4	
	TCGT110308	●	●	●	●	●		3°~5°	Φ6.35	3.18	2.8	0.8	
	TCGW11T304	●	●	●	●	●		—	Φ6.35	3.97	2.8	0.4	
	TCGW11T306	●	●	●	●	●		—	Φ6.35	3.97	2.8	0.6	
	TCGW11T308	●	●	●	●	●		—	Φ6.35	3.97	2.8	0.8	
	TCGT11T304	●	●	●	●	●		5°~10°	Φ6.35	3.97	2.8	0.4	
	TCGT11T306	●	●	●	●	●		5°~10°	Φ6.35	3.97	2.8	0.6	
	TCGT11T308	●	●	●	●	●		5°~10°	Φ6.35	3.97	2.8	0.8	
	TCGW16T304	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.4	
	TCGW16T308	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.8	
	TCGW16T312	●	●	●	●	●		—	Φ9.525	3.97	4.4	1.2	
	TCGT16T304	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.4	
	TCGT16T308	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.8	
	TCGT16T312	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	1.2	
	TCGW160404	●	●	●	●	●		—	Φ9.525	4.76	4.4	0.4	
	TCGW160408	●	●	●	●	●		—	Φ9.525	4.76	4.4	0.8	
	TCGW160412	●	●	●	●	●		—	Φ9.525	4.76	4.4	1.2	
	TCGT160404	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	0.4	
	TCGT160408	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	0.8	
	TCGT160412	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	1.2	

TP Triangular 60°
Positive 11°

Insert shape	Designation	Material code					Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	TPGW080202	●	●	●	●	●	—	Φ4.76	2.38	2.4	0.2	
	TPGW080204	●	●	●	●	●	—	Φ4.76	2.38	2.4	0.4	
	TPGW080206	●	●	●	●	●	—	Φ4.76	2.38	2.4	0.6	
	TPGT080202	●	●	●	●	●	3°~5°	Φ4.76	2.38	2.4	0.2	
	TPGT080204	●	●	●	●	●	3°~5°	Φ4.76	2.38	2.4	0.4	
	TPGT080206	●	●	●	●	●	3°~5°	Φ4.76	2.38	2.4	0.6	
	TPGW090202	●	●	●	●	●	—	Φ5.56	2.38	2.8	0.2	
	TPGW090204	●	●	●	●	●	—	Φ5.56	2.38	2.8	0.4	
	TPGW090208	●	●	●	●	●	—	Φ5.56	2.38	2.8	0.8	
	TPGT090202	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.8	0.2	
	TPGT090204	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.8	0.4	
	TPGT090208	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.8	0.8	
	TPGW110202	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.2	
	TPGW110204	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.4	
	TPGW110208	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.8	
	TPGT110202	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.2	
	TPGT110204	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.4	
	TPGT110208	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.8	
	TPGW110302	●	●	●	●	●	—	Φ6.35	3.18	2.8	0.2	
	TPGW110304	●	●	●	●	●	—	Φ6.35	3.18	2.8	0.4	
	TPGW110308	●	●	●	●	●	—	Φ6.35	3.18	2.8	0.8	
	TPGT110302	●	●	●	●	●	3°~5°	Φ6.35	3.18	3.4	0.2	
	TPGT110304	●	●	●	●	●	3°~5°	Φ6.35	3.18	3.4	0.4	
	TPGT110308	●	●	●	●	●	3°~5°	Φ6.35	3.18	3.4	0.8	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder






Threading

Parting / Grooving







Miniature Tool

TP Triangular 60°
Positive 11°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	TPGW160304	●	●	●	●	●		—	Φ9.525	3.18	4.4	0.4	
	TPGW160308	●	●	●	●	●		—	Φ9.525	3.18	4.4	0.8	
	TPGW160312	●	●	●	●	●		—	Φ9.525	3.18	4.4	1.2	
	TPGT160304	●	●	●	●	●		3°~5°	Φ9.525	3.18	4.4	0.4	
	TPGT160308	●	●	●	●	●		3°~5°	Φ9.525	3.18	4.4	0.8	
	TPGT160312	●	●	●	●	●		3°~5°	Φ9.525	3.18	4.4	1.2	
	TPGW16T304	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.4	
	TPGW16T308	●	●	●	●	●		—	Φ9.525	3.97	4.4	0.8	
	TPGW16T312	●	●	●	●	●		—	Φ9.525	3.97	4.4	1.2	
	TPGT16T304	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.4	
	TPGT16T308	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	0.8	
	TPGT16T312	●	●	●	●	●		5°~10°	Φ9.525	3.97	4.4	1.2	
	TPGW160402	●	●	●	●	●		—	Φ9.525	4.76	4.4	0.2	
	TPGW160404	●	●	●	●	●		—	Φ9.525	4.76	4.4	0.4	
	TPGW160408	●	●	●	●	●		—	Φ9.525	4.76	4.4	0.8	
	TPGW160412	●	●	●	●	●		—	Φ9.525	4.76	4.4	1.2	
	TPGT160402	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	0.2	
	TPGT160404	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	0.4	
	TPGT160408	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	0.8	
	TPGT160412	●	●	●	●	●		5°~10°	Φ9.525	4.76	4.4	1.2	

SN Square 90°
Negative

Insert shape	Designation	Material code						Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	SNGA090304	●	●	●	●	●	—	Φ9.525	3.18	3.8	0.4	
	SNGA090308	●	●	●	●	●	—	Φ9.525	3.18	3.8	0.8	
	SNGA090312	●	●	●	●	●	—	Φ9.525	3.18	3.8	1.2	
	SNGA120404	●	●	●	●	●	—	Φ12.7	4.76	5.16	0.4	
	SNGA120408	●	●	●	●	●	—	Φ12.7	4.76	5.16	0.8	
	SNGA120412	●	●	●	●	●	—	Φ12.7	4.76	5.16	1.2	
	SNGA150604	●	●	●	●	●	—	Φ15.875	6.35	6.35	0.4	
	SNGA150608	●	●	●	●	●	—	Φ15.875	6.35	6.35	0.8	
	SNGA150612	●	●	●	●	●	—	Φ15.875	6.35	6.35	1.2	
	SNGA150616	●	●	●	●	●	—	Φ15.875	6.35	6.35	1.6	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder

















Threading

Parting, Grooving









Miniature Tool

SC Square 90°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting ,Grooving
Miniature Tool

Insert shape	Designation	Material code						Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	SCGW050202	●	●	●	●	●	—	Φ5.56	2.38	2.2	0.2		
	SCGW050204	●	●	●	●	●	—	Φ5.56	2.38	2.2	0.4		
	SCGT050202	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.2	0.2		
	SCGT050204	●	●	●	●	●	3°~5°	Φ5.56	2.38	2.2	0.4		
	SCGW060202	●	●	●	●	●	—	Φ6.35	2.38	2.2	0.2		
	SCGW060204	●	●	●	●	●	—	Φ6.35	2.38	2.2	0.4		
	SCGW060208	●	●	●	●	●	—	Φ6.35	2.38	2.2	0.8		
	SCGT060202	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.2	0.2		
	SCGT060204	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.2	0.4		
	SCGT060208	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.2	0.8		
	SCGW070202	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.2		
	SCGW070204	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.4		
	SCGW070208	●	●	●	●	●	—	Φ7.94	2.38	3.4	0.8		
	SCGT070202	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.2		
	SCGT070204	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.4		
	SCGT070208	●	●	●	●	●	3°~5°	Φ7.94	2.38	3.4	0.8		
	SCGW090302	●	●	●	●	●	—	Φ9.525	3.18	4.4	0.2		
	SCGW090304	●	●	●	●	●	—	Φ9.525	3.18	4.4	0.4		
	SCGW090308	●	●	●	●	●	—	Φ9.525	3.18	4.4	0.8		
	SCGT090302	●	●	●	●	●	3°~5°	Φ9.525	3.18	4.4	0.2		
	SCGT090304	●	●	●	●	●	3°~5°	Φ9.525	3.18	4.4	0.4		
	SCGT090308	●	●	●	●	●	3°~5°	Φ9.525	3.18	4.4	0.8		

















SC Square 90°
Positive 7°

Insert shape	Designation	Material code						Rake angle (γ_0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd_1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	SCGW09T302	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.2		
	SCGW09T304	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.4		
	SCGW09T308	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.8		
	SCGT09T302	●	●	●	●	●	3°~5°	Φ9.525	3.97	4.4	0.2		
	SCGT09T304	●	●	●	●	●	3°~5°	Φ9.525	3.97	4.4	0.4		
	SCGT09T308	●	●	●	●	●	3°~5°	Φ9.525	3.97	4.4	0.8		
	SCGW120404	●	●	●	●	●	—	Φ12.7	4.76	5.5	0.4		
	SCGW120408	●	●	●	●	●	—	Φ12.7	4.76	5.5	0.8		
	SCGW120412	●	●	●	●	●	—	Φ12.7	4.76	5.5	1.2		
	SCGT120404	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	0.4		
	SCGT120408	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	0.8		
	SCGT120412	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	1.2		









Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

SP Square 90°
Positive 11°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting ,Grooving
Miniature Tool

Insert shape	Designation	Material code					Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	SPGW060202	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.2	
	SPGW060204	●	●	●	●	●	—	Φ6.35	2.38	2.8	0.4	
	SPGT060202	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.2	
	SPGT060204	●	●	●	●	●	3°~5°	Φ6.35	2.38	2.8	0.4	
	SPGW070202	●	●	●	●	●	—	Φ7.97	2.38	3.4	0.2	
	SPGW070204	●	●	●	●	●	—	Φ7.97	2.38	3.4	0.4	
	SPGW070208	●	●	●	●	●	—	Φ7.97	2.38	3.4	0.8	
	SPGT070202	●	●	●	●	●	3°~5°	Φ7.97	2.38	3.4	0.2	
	SPGT070204	●	●	●	●	●	3°~5°	Φ7.97	2.38	3.4	0.4	
	SPGT070208	●	●	●	●	●	3°~5°	Φ7.97	2.38	3.4	0.8	
	SPGW070302	●	●	●	●	●	—	Φ7.97	3.18	3.4	0.2	
	SPGW070304	●	●	●	●	●	—	Φ7.97	3.18	3.4	0.4	
	SPGW070308	●	●	●	●	●	—	Φ7.97	3.18	3.4	0.8	
	SPGT070302	●	●	●	●	●	3°~5°	Φ7.97	3.18	3.4	0.2	
	SPGT070304	●	●	●	●	●	3°~5°	Φ7.97	3.18	3.4	0.4	
	SPGT070308	●	●	●	●	●	3°~5°	Φ7.97	3.18	3.4	0.8	
	SPGW090302	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.2	
	SPGW090304	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.4	
	SPGW090308	●	●	●	●	●	—	Φ9.525	3.18	3.4	0.8	
	SPGT090302	●	●	●	●	●	3°~5°	Φ9.525	3.18	3.4	0.2	
	SPGT090304	●	●	●	●	●	3°~5°	Φ9.525	3.18	3.4	0.4	
	SPGT090308	●	●	●	●	●	3°~5°	Φ9.525	3.18	3.4	0.8	

SP Square 90°
Positive 11°

Insert shape	Designation	Material code						Rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	SPGW09T304	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.4		
	SPGW09T306	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.6		
	SPGW09T308	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.8		
	SPGT09T304	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.4		
	SPGT09T306	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.6		
	SPGT09T308	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.8		
	SPGW120404	●	●	●	●	●	—	Φ12.7	4.76	5.5	0.4		
	SPGW120408	●	●	●	●	●	—	Φ12.7	4.76	5.5	0.8		
	SPGW120412	●	●	●	●	●	—	Φ12.7	4.76	5.5	1.2		
	SPGT120404	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	0.4		
	SPGT120408	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	0.8		
	SPGT120412	●	●	●	●	●	5°~10°	Φ12.7	4.76	5.5	1.2		

Insert

External Toolholder

Internal Toolholder

PSC Toolholder



Threading

Parting, Grooving







Miniature Tool

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool











WN Trigon 80°
Negative

Insert shape	Designation	Material code						Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TDA1000	TDA1500	TDC2000	MCD	ND							
	WNGA080404	●	●	●	●	●		—	Φ12.7	4.76	5.16	0.4	
	WNGA080408	●	●	●	●	●		—	Φ12.7	4.76	5.16	0.8	
	WNGA080412	●	●	●	●	●		—	Φ12.7	4.76	5.16	1.2	

WB Trigon 80°
Positive 5°

Insert shape	Designation	Material code						Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TDA1000	TDA1500	TDC2000	MCD	ND							
	WBGW060102	●	●	●	●	●		—	Φ3.97	1.59	2.2	0.2	
	WBGW060104	●	●	●	●	●		—	Φ3.97	1.59	2.2	0.4	
	WBGW080202	●	●	●	●	●		—	Φ4.76	2.38	2.4	0.2	
	WBGW080204	●	●	●	●	●		—	Φ4.76	2.38	2.4	0.4	
	WBG080202	●	●	●	●	●		3°~5°	Φ4.76	2.38	2.4	0.2	
	WBG080204	●	●	●	●	●		3°~5°	Φ4.76	2.38	2.4	0.4	



WC Trigon 80°
Positive 7°

Insert shape	Designation	Material code					Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TDA1000	TDA1500	TDC2000	MCD	ND						
	WCGW020102	●	●	●	●	●	—	Φ3.97	1.59	2.3	0.2	
	WCGW020104	●	●	●	●	●	—	Φ3.97	1.59	2.3	0.4	
	WCGW050302	●	●	●	●	●	—	Φ7.94	3.18	3.5	0.2	
	WCGW050304	●	●	●	●	●	—	Φ7.94	3.18	3.5	0.4	
	WCGW050308	●	●	●	●	●	—	Φ7.94	3.18	3.5	0.8	
	WCGT050302	●	●	●	●	●	5°~10°	Φ7.94	3.18	3.5	0.2	
	WCGT050304	●	●	●	●	●	5°~10°	Φ7.94	3.18	3.5	0.4	
	WCGT050308	●	●	●	●	●	5°~10°	Φ7.94	3.18	3.5	0.8	
	WCGW06T302	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.2	
	WCGW06T304	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.4	
	WCGW06T308	●	●	●	●	●	—	Φ9.525	3.97	4.4	0.8	
	WCGT06T302	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.2	
	WCGT06T304	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.4	
	WCGT06T308	●	●	●	●	●	5°~10°	Φ9.525	3.97	4.4	0.8	



Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

Insert
 External Toolholder
 Internal Toolholder
 PSC Toolholder
 Threading
 Parting, Grooving
 Miniature Tool



RC Round Positive 7°

Insert shape	Designation	Material code						Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	RCGW060200	●	●	●	●	●	—	Φ6	2.38	2.8	—	
	RCGW080300	●	●	●	●	●	—	Φ8	3.18	3.4	—	
	RCGW100300	●	●	●	●	●	—	Φ10	3.18	3.6	—	
	RCGW120400	●	●	●	●	●	—	Φ12	4.76	4.2	—	
	RCGW160600	●	●	●	●	●	—	Φ16	6.35	5.2	—	







RP Round Positive 11°

Insert shape	Designation	Material code						Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	RPGW080300	●	●	●	●	●	—	Φ8	3.18	3.4	—	
	RPGW100400	●	●	●	●	●	—	Φ10	4.76	3.8	—	
	RPGW120400	●	●	●	●	●	—	Φ12	4.76	4.2	—	
	RPGW160400	●	●	●	●	●	—	Φ16	4.76	5.2	—	

CN Rhombic 80° Negative

Insert shape	Designation	Material code						Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	CNGN120404	●	●	●	●	●	—	Φ12.7	4.76	—	0.4	
	CNGN120408	●	●	●	●	●	—	Φ12.7	4.76	—	0.8	
	CNGN120412	●	●	●	●	●	—	Φ12.7	4.76	—	1.2	

TN Triangular 60°
Negative

Insert shape	Designation	Material code						rake angle (γ0)	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND							
	TNGN110302	●	●	●	●	●		—	Φ6.35	3.18	—	0.2	
	TNGN110304	●	●	●	●	●		—	Φ6.35	3.18	—	0.4	
	TNGN110308	●	●	●	●	●		—	Φ6.35	3.18	—	0.8	
	TNGN160304	●	●	●	●	●		—	Φ9.525	3.18	—	0.4	
	TNGN160308	●	●	●	●	●		—	Φ9.525	3.18	—	0.8	
	TNGN160312	●	●	●	●	●		—	Φ9.525	3.18	—	1.2	
	TNGN160404	●	●	●	●	●		—	Φ9.525	4.76	—	0.4	
	TNGN160408	●	●	●	●	●		—	Φ9.525	4.76	—	0.8	
	TNGN160412	●	●	●	●	●		—	Φ9.525	4.76	—	1.2	
	TNGN160416	●	●	●	●	●		—	Φ9.525	4.76	—	1.6	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder

Threading

Parting, Grooving

Miniature Tool

TP Triangular 60°
Positive 11°

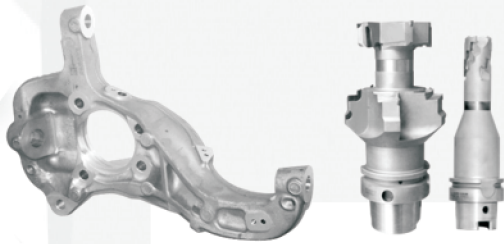
Insert shape	Designation	Material code						Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	TPGN090202	●	●	●	●	●		Φ5.56	2.38	—	0.2	
	TPGN090204	●	●	●	●	●		Φ5.56	2.38	—	0.4	
	TPGN090208	●	●	●	●	●		Φ5.56	2.38	—	0.8	
	TPGN110302	●	●	●	●	●		Φ6.35	3.18	—	0.2	
	TPGN110304	●	●	●	●	●		Φ6.35	3.18	—	0.4	
	TPGN110308	●	●	●	●	●		Φ6.35	3.18	—	0.8	
	TPGN160304	●	●	●	●	●		Φ9.525	3.18	—	0.4	
	TPGN160308	●	●	●	●	●		Φ9.525	3.18	—	0.8	
	TPGN160312	●	●	●	●	●		Φ9.525	3.18	—	1.2	
	TPGN160404	●	●	●	●	●		Φ9.525	4.76	—	0.4	
	TPGN160408	●	●	●	●	●		Φ9.525	4.76	—	0.8	
	TPGN160412	●	●	●	●	●		Φ9.525	4.76	—	1.2	
	TPGN160416	●	●	●	●	●		Φ9.525	4.76	—	1.6	

SN Square 90°
Negative

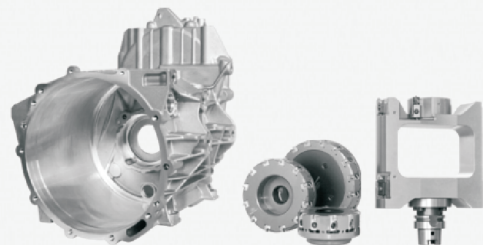
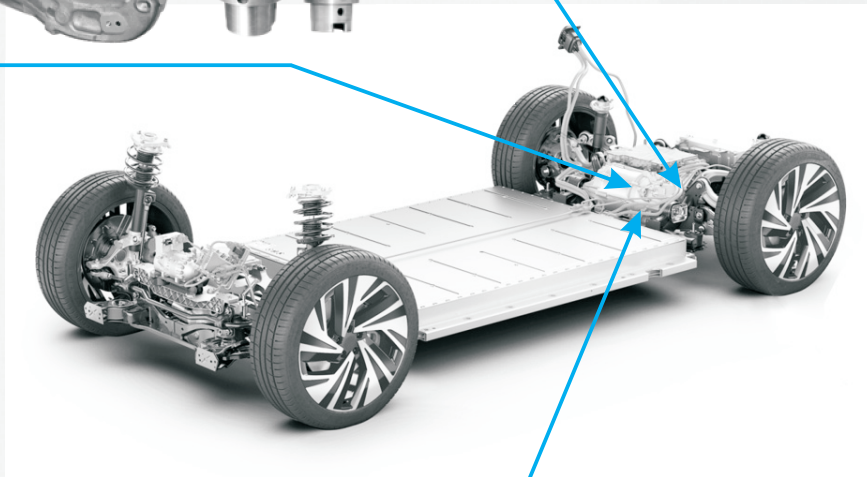
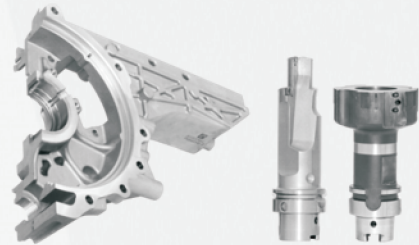
Insert shape	Designation	Material code						Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TDA1000	TDA1500	TDC2000	MCD	ND						
	SNGN090302	●	●	●	●	●		Φ9.525	3.18	—	0.2	
	SNGN090304	●	●	●	●	●		Φ9.525	3.18	—	0.4	
	SNGN090308	●	●	●	●	●		Φ9.525	3.18	—	0.8	
	SNGN120404	●	●	●	●	●		Φ12.7	4.76	—	0.4	
	SNGN120408	●	●	●	●	●		Φ12.7	4.76	—	0.8	
	SNGN120412	●	●	●	●	●		Φ12.7	4.76	—	1.2	

Electric vehicle industry solutions

Knuckle solution



Motor rear-end cover processing solution



Motor housing solution

Insert

External Toolholder

Internal Toolholder

PSC Toolholder


Threading

Parting, Grooving

Miniature Tool

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting ,Grooving
Miniature Tool

Motor housing solution



PDEC30 Series - Face milling cutter

Applications:
General tool suitable for roughing and finishing milling of aluminium, copper and other non-ferrous metal surface.

- Diameter :D63-D250(Customizable)
- Z:3-20(Customizable)
- Holder type:standard milling holder

- Advantages:**
- Light weight, high strength aluminium body.
 - Suitable for high efficiency face milling of roughing and finishing Internal coolant goes directly to tip, helpful for chipping removal, with better tool life.
 - Flexible insert can regrind and retip, cutter can be reused to save cost.
 - Cycle runout within 0.03mm, Axial runout within 0.003 to ensure the workpiece roughness.
 - Adjusting the position with spanner is easy and convenient with max scope 2mm, that increases the regrinding numbers.

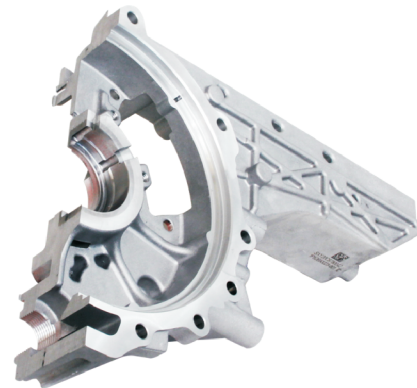


Compound finish boring tool with big diamet

Applications:
Aluminium parts of big diameter inner hole for Motor housing

- Advantages:**
- Light weight, high strength aluminium body.
 - Suitable for precision adjustment of finishing machining.
 - Simple, lasting body structure.
 - The design of internal coolant going directly to insert edge and lubricating is helpful to increase tool life.
 - Flexible insert and cartridge with low cost and high performance.
 - Can be customized for special solution.

Motor rear-end cover processing solution



Indexable short hole drilling compound tool



Applications:

General tool suitable for rough and semi-finish machining of workpiece without precast hole.

Advantages:

- The integral design of tool holder and body with excellent rigidity.
- Use special high strength steel with surface strengthening treatment, the tool body has better wear resistance performance.
- Maximum chip flute design can get more smooth chip discharge.
- Compound tool design can realize both rough and semi-finish machining requirements of the hole.
- The insert installation angle with cutting balance design, it will reach slight cutting vibration, low machine spindle load, high cutting efficiency, better drilling precision and surface roughness.
- Through change the material and cutting edge design of indexable inserts, the tool can be used in rough and semi-finish machining of various material workpieces.
- It can be used as the basis of custom special solutions for customers.

Guide finish boring tool



Applications:

General tool for most area with high precision and production capability.

Advantages:

- With very high precision and machining ability, the flexible insert based on guide pad in the hole guiding and precision cutting to ensure the machining effect with high quality.
- It ensures insert is assembled in the groove by suitable adjustment and clamping system.
- The resistable insert produced with modern manufacturing process can be made with different shape edge and non-standard edge structure.
- The design of internal coolant going directly to insert edge and lubricating is helpful to increase tool life.
- Flexible insert and high wear resistance guide pad with low cost and high performance.
- Can be customized for special solution.

Insert

External Toolholder

Internal Toolholder

PSC Toolholder

Treading

Parting, Grooving

Miniature Tool

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

Steering knuckle solution



PCD compound finish boring tool

Applications:
Used for the front and back surface machining of aluminum alloy steering knuckle bearing hole.

- Advantages:**
- Rough and finish machining integrated design, when improve working efficiency it does not reduce the machining quality;
 - When machining back surface of bearing hole, compound milling structure no need change the tool and this will reduce the tool change time.
 - Multi-cutting edge design, improve machining efficiency.



TDE30 series PCD corn milling tool with HSK holder

Applications:
Applied for end milling and side milling caliper hole surface, threaded hole surface of waterproof cover and other small surface.

- Advantages:**
- PCD corn end milling tool possesses higher machining efficiency and metal remove rate when it is used in large allowance cutting.
 - Thread chip removing groove possesses better chip removing performance, and intergral structure can guarantee stable tool strength. Applied for semi-finish and rough machining.
 - Applied for end milling, side milling, groove milling, profile milling and thread interpolation milling and other milling.
 - PCD possesses high durability and toughness.

CBN

CBN Guidance For Grade And Chipbreaker

A30-34

CBN Standard Inserts

A35-95

CBN Application

A96

PCD

PCD Guidance For Grade And Chipbreaker

A97-101

PCD Standard Inserts

A102-130

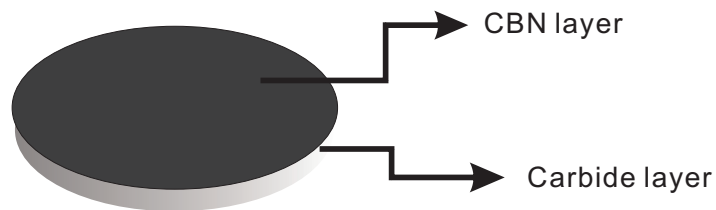
PCD Application

A131-134

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting ,Grooving
Miniature Tool

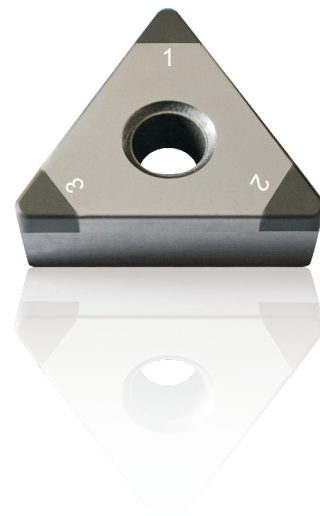
Characteristics of Cubic Boron Nitride (CBN)

Cubic boron nitride (CBN) is an excellent tool material with high hardness, high heat resistance and high chemical inertness. It can be applied to difficult-to-machine materials such as hardened steel, cast iron, superalloy and powder metal. Due to its high temperature resistance, high hardness, strong cutting force and low friction coefficient, CBN inserts enable to produce workpieces with outstanding surface roughness and maintain long life, high efficiency and stable performance.



The advantages and features of one-off inserts

- Economy**
 Multi cutting tips brazed on one insert. Compared with regrindable, its price is more economical and easier to be accepted.
- Convenience**
 One-off multi-tip inserts are used for surrounding grinding which can be rejected after reaching to rejection standard. In addition, the inserts tips are marked so that they can be easily controlled in use.
- Reliability**
 It adopts high quality material and blunting edges according to the cutting conditions, wear resistance and tip breakage resistance are taken into full consideration.



Recommended Grades

	Grade	CBN Content (%)	Grain Size (µm)	Work Material		Features	Application
Uncoated	TCBH510	50 to 55	3	H	Hardened Steel	General-purpose grade for hardened steel machining with a high degree of fracture and wear resistance.	Bearing Steel Carburised Steel
	TCBH520	60 to 65	2		Hardened Steel	Achieve ultimate cutting edge strength. Suitable for light interrupted cutting.	Bearing Steel Carburised Steel
	TCBK100	90 to 95	2	K	Gray Cast Iron	Grade exhibiting wear and fracture resistance in cutting of cast iron.	Cylinder Block and Head
	TCBX800	90 to 95	1	S	Sintered Alloy	Grade exhibiting improved wear and fracture resistance in cutting of sintered alloy.	Sintered Parts Valve Seat Ring
	TCBS700	90 to 95	4		Heat-resistant Alloy	Provides long tool life in the finishing of Heat-resistant Alloy	Aerospace Parts
coated	TCCH620	65 to 70	2	H	Hardened Steel	Utilising a tough substrate along with a highly wear-resistant and adhesive coating layer, to achieve long tool life in general-purpose to high-efficiency machining.	Bearing Steel Carburised Steel

Cutting Conditions

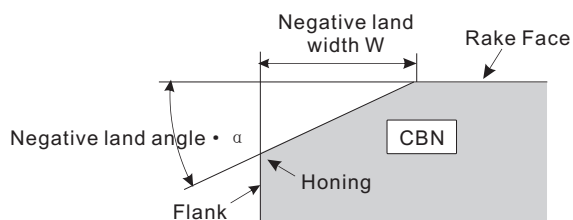
ISO	Work Material	Grade	Cutting Condition		
			Vc (m/min)	f (mm/rev)	ap(mm)
H	Mould Steel	TCBH510/TCBH520	90-110	0.1-0.2	0.1-0.5
	Hardened Steel (>HRC 45)	TCBH510/TCBH520	120-250	0.1-0.5	0.5-2.5
K	Hardened Steel (>HRC 45)	TCCH620	90-110	0.1-0.2	0.1-0.5
			150-250	0.1-0.5	0.5-2.5
M	Gray Cast Iron	TCBK100	400-1500	0.1-0.8	3.0
M	<16%Co Sintered	TCBX800	20-40	0.1-0.25	0.1-1.0
	Ni-based Heat-resistant Alloy	TCBS700	40-100	0.05-0.2	0.1-1.0

Insert Edge Specification Overview

ISO	Work Material	Grade	Standard				Low Cutting Force Type				Strong Edge Type			
			Code	α	W	Honing	Code	α	W	Honing	Code	α	W	Honing
H	Hardened Steel	TCBH510	S01020	20°	0.1	Yes	T01015	15°	0.1	No	S02020	20°	0.2	Yes
		TCBH520					S01015	15°	0.1	Yes	S01530	30°	0.15	Yes
		TCCH620					T01015	15°	0.1	Yes	S01525	25°	0.15	Yes
K	Gray Cast Iron	TCBK100	T01020	20°	0.1	No	HL	-	-	Yes	S01525	25°	0.15	Yes
		TCBX800	T01015	15°	0.1	No	T01015	15°	0.1	No	T01525	25°	0.15	No
M	Sintered Alloy Heat-resistant Alloy	TCBS700	T01020	20°	0.1	No	HL	-	-	Yes	S01525	25°	0.15	Yes

★ Customer can choose special insert edge according to exact demand

Edge specification size identification code



S: Cutting Edge Shape
 T: Negative land
 S: Negative land + Honing



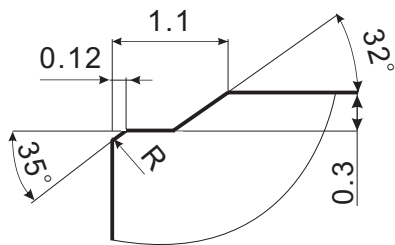
EX: S01225
→ 25° / 0.12mm Negative Land with Honing



CBN Chipbreaker

- Chipbreaker incorporated on the CBN cutting edge to maintain chip control capabilities throughout the machining process.
- Unique chipbreaker design can be applied to both hardened and non-hardened parts with effective chip control.


HM Chipbreaker HM Rough/Semi-finishing cutting





Providing ideal chip control in large cutting depth by the well designed chipbreaker. Suitable for medium cutting or roughing.

External Carburized Layer Removal		Without chip slot
		With chip slot
Work Material	:SCr420 Carburised Steel	
Tool No.	:4-CNGG120408-HM	
Cutting Conditions	:Vc=150m/min, f=0.15mm/rev, ap=0.5mm	

HF Chipbreaker HF Finishing cutting



Range of application:



Excellent chip control in small cutting depth due to the high functional nose. Delivers exceptional surface finishes.

Finishing of Hardened Steel		Without chip slot
Work Material :Carburised Steel (60HRC Automotive Component) Tool No. :2-CCGT060204-HF Cutting Conditions :Vc=80m/min, f=0.08mm/rev ap=0.15mm Wet		

★ HM HF Chipbreakers are available

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

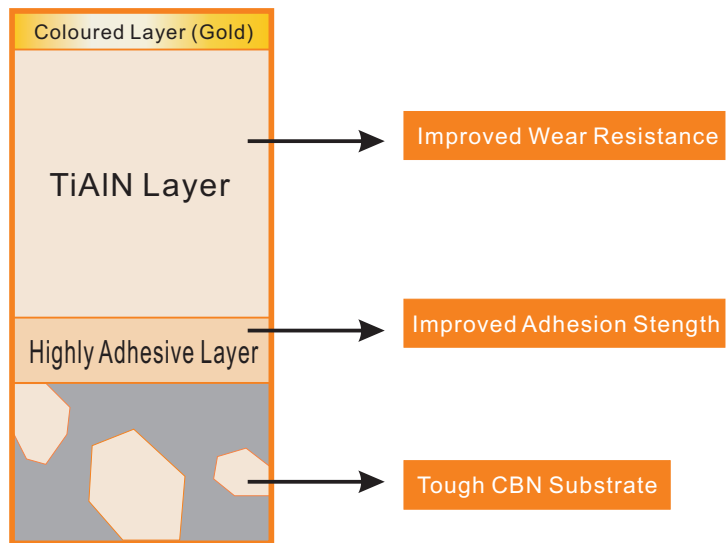
Coated CBN

TCCH620



- General-purpose grade suitable for typical hardened steel machining applications. Achieves further stability in machining of a wide range of hardened steel components.

■ General-purpose Machining (Low to Medium speed, Unstable Cutting)



Application of highly wear-resistant TiAlN coating to a tough substrate. Machining stability in low-rigidity environments and high-load cutting is dramatically improved.

Insert

External Toolholder

Internal Toolholder







PSC Toolholder

Threading

Parting, Grooving

Miniature Tool

CN Rhombic 80°
Negative

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
	CNGA090302	●	●	●	●			●	●	1	Φ9.525	3.18	3.81	0.2	
	CNGA090304	●	●	●	●			●	●	1	Φ9.525	3.18	3.81	0.4	
	CNGA090306	●	●	●	●			●	●	1	Φ9.525	3.18	3.81	0.6	
	CNGA090308	●	●	●	●			●	●	1	Φ9.525	3.18	3.81	0.8	
Multi-tip insert															
	2-CNGA090302	●	●	●	●			●	●	2	Φ9.525	3.18	3.81	0.2	
	2-CNGA090304	●	●	●	●			●	●	2	Φ9.525	3.18	3.81	0.4	
	2-CNGA090306	●	●	●	●			●	●	2	Φ9.525	3.18	3.81	0.6	
	2-CNGA090308	●	●	●	●			●	●	2	Φ9.525	3.18	3.81	0.8	
Single-tip insert															
	CNGA09T302	●	●	●	●			●	●	1	Φ9.525	3.97	3.81	0.2	
	CNGA09T304	●	●	●	●			●	●	1	Φ9.525	3.97	3.81	0.4	
	CNGA09T306	●	●	●	●			●	●	1	Φ9.525	3.97	3.81	0.6	
	CNGA09T308	●	●	●	●			●	●	1	Φ9.525	3.97	3.81	0.8	
Multi-tip insert															
	2-CNGA09T302	●	●	●	●			●	●	2	Φ9.525	3.97	3.81	0.2	
	2-CNGA09T304	●	●	●	●			●	●	2	Φ9.525	3.97	3.81	0.4	
	2-CNGA09T306	●	●	●	●			●	●	2	Φ9.525	3.97	3.81	0.6	
	2-CNGA09T308	●	●	●	●			●	●	2	Φ9.525	3.97	3.81	0.8	
Single-tip insert															
	CNGA090402	●	●	●	●			●	●	1	Φ9.525	4.76	3.81	0.2	
	CNGA090404	●	●	●	●			●	●	1	Φ9.525	4.76	3.81	0.4	
	CNGA090408	●	●	●	●			●	●	1	Φ9.525	4.76	3.81	0.8	
	CNGA090412	●	●	●	●			●	●	1	Φ9.525	4.76	3.81	1.2	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder











Threading

Parting / Grooving









Miniature Tool

CN Rhombic 80°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	2-CNGA090402	●	●	●	●	●	●	2	Φ9.525	4.76	3.81	0.2	
	2-CNGA090404	●	●	●	●	●	●	2	Φ9.525	4.76	3.81	0.4	
	2-CNGA090408	●	●	●	●	●	●	2	Φ9.525	4.76	3.81	0.8	
	2-CNGA090412	●	●	●	●	●	●	2	Φ9.525	4.76	3.81	1.2	
	4-CNGA090402	●	●	●	●	●	●	4	Φ9.525	4.76	3.81	0.2	
	4-CNGA090404	●	●	●	●	●	●	4	Φ9.525	4.76	3.81	0.4	
	4-CNGA090408	●	●	●	●	●	●	4	Φ9.525	4.76	3.81	0.8	
	4-CNGA090412	●	●	●	●	●	●	4	Φ9.525	4.76	3.81	1.2	
Single-tip insert													
	CNGA120402	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.2	
	CNGA120404	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.4	
	CNGA120408	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.8	
	CNGA120412	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	1.2	
Multi-tip insert													
	2-CNGA120402	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.2	
	2-CNGA120404	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.4	
	2-CNGA120408	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.8	
	2-CNGA120412	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	1.2	
	4-CNGA120402	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.2	
	4-CNGA120404	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.4	
	4-CNGA120408	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.8	
	4-CNGA120412	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.2	





CN Rhombic 80°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	CNGA160602	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	0.2	
	CNGA160604	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	0.4	
	CNGA160608	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	0.8	
	CNGA160612	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	1.2	
Multi-tip insert													
	2-CNGA160602	●	●	●	●	●	●	2	Φ15.875	6.35	6.35	0.2	
	2-CNGA160604	●	●	●	●	●	●	2	Φ15.875	6.35	6.35	0.4	
	2-CNGA160608	●	●	●	●	●	●	2	Φ15.875	6.35	6.35	0.8	
	2-CNGA160612	●	●	●	●	●	●	2	Φ15.875	6.35	6.35	1.2	
Multi-tip insert													
	4-CNGA160602	●	●	●	●	●	●	4	Φ15.875	6.35	6.35	0.2	
	4-CNGA160604	●	●	●	●	●	●	4	Φ15.875	6.35	6.35	0.4	
	4-CNGA160608	●	●	●	●	●	●	4	Φ15.875	6.35	6.35	0.8	
	4-CNGA160612	●	●	●	●	●	●	4	Φ15.875	6.35	6.35	1.2	
Single-tip insert													
	CNGA190604	●	●	●	●	●	●	1	Φ19.05	6.35	7.94	0.4	
	CNGA190608	●	●	●	●	●	●	1	Φ19.05	6.35	7.94	0.8	
	CNGA190610	●	●	●	●	●	●	1	Φ19.05	6.35	7.94	1.0	
	CNGA190612	●	●	●	●	●	●	1	Φ19.05	6.35	7.94	1.2	
	CNGA190616	●	●	●	●	●	●	1	Φ19.05	6.35	7.94	1.6	
	CNGA190624	●	●	●	●	●	●	1	Φ19.05	6.35	7.94	2.4	











Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Treading
Parting, Grooving
Miniature Tool

CN Rhombic 80°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	2-CNGA190604	●	●	●	●	●	●	2	Φ19.05	6.35	7.94	0.4	
	2-CNGA190608	●	●	●	●	●	●	2	Φ19.05	6.35	7.94	0.8	
	2-CNGA190610	●	●	●	●	●	●	2	Φ19.05	6.35	7.94	1.0	
	2-CNGA190612	●	●	●	●	●	●	2	Φ19.05	6.35	7.94	1.2	
	2-CNGA190616	●	●	●	●	●	●	2	Φ19.05	6.35	7.94	1.6	
	2-CNGA190624	●	●	●	●	●	●	2	Φ19.05	6.35	7.94	2.4	
	4-CNGA190604	●	●	●	●	●	●	4	Φ19.05	6.35	7.94	0.4	
	4-CNGA190608	●	●	●	●	●	●	4	Φ19.05	6.35	7.94	0.8	
	4-CNGA190610	●	●	●	●	●	●	4	Φ19.05	6.35	7.94	1.0	
	4-CNGA190612	●	●	●	●	●	●	4	Φ19.05	6.35	7.94	1.2	
	4-CNGA190616	●	●	●	●	●	●	4	Φ19.05	6.35	7.94	1.6	
	4-CNGA190624	●	●	●	●	●	●	4	Φ19.05	6.35	7.94	2.4	

CC Rhombic 80°
Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700							
Single-tip insert														
	CCMW03S102	●	●	●	●		●	●	1	Φ3.57	1.39	2.0	0.2	
	CCMW03S104	●	●	●	●		●	●	1	Φ3.57	1.39	2.0	0.4	
	CCMW04T002	●	●	●	●		●	●	1	Φ4.37	1.79	2.4	0.2	
	CCMW04T004	●	●	●	●		●	●	1	Φ4.37	1.79	2.4	0.4	
Single-tip insert														
	CCGW050202	●	●	●	●		●	●	1	Φ5.56	2.38	2.4	0.2	
	CCGW050204	●	●	●	●		●	●	1	Φ5.56	2.38	2.4	0.4	
	CCGW050206	●	●	●	●		●	●	1	Φ5.56	2.38	2.4	0.6	
Single-tip insert														
	CCGW060202	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.2	
	CCGW060204	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.4	
	CCGW060206	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.6	
	CCGW060208	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.8	
Multi-tip insert														
	2-CCGW060202	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.2	
	2-CCGW060204	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.4	
	2-CCGW060206	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.6	
	2-CCGW060208	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.8	
Single-tip insert														
	CCMW080202	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.2	
	CCMW080204	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.4	
	CCMW080206	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.6	
	CCMW080208	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.8	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder











Threading

Parting / Grooving








Miniature Tool

CC Rhombic 80°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Multi-tip insert															
	2-CCMW080202	●	●	●	●			●	●	2	Φ7.94	2.38	3.4	0.2	
	2-CCMW080204	●	●	●	●			●	●	2	Φ7.94	2.38	3.4	0.4	
	2-CCMW080206	●	●	●	●			●	●	2	Φ7.94	2.38	3.4	0.6	
	2-CCMW080208	●	●	●	●			●	●	2	Φ7.94	2.38	3.4	0.8	
Single-tip insert															
	CCGW09T302	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.2	
	CCGW09T304	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.4	
	CCGW09T306	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.6	
	CCGW09T308	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.8	
Multi-tip insert															
	2-CCGW09T302	●	●	●	●			●	●	2	Φ9.525	3.97	4.4	0.2	
	2-CCGW09T304	●	●	●	●			●	●	2	Φ9.525	3.97	4.4	0.4	
	2-CCGW09T306	●	●	●	●			●	●	2	Φ9.525	3.97	4.4	0.6	
	2-CCGW09T308	●	●	●	●			●	●	2	Φ9.525	3.97	4.4	0.8	
Single-tip insert															
	CCGW120402	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	0.2	
	CCGW120404	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	0.4	
	CCGW120406	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	0.6	
	CCGW120408	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	0.8	
	CCGW120412	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	1.2	
Multi-tip insert															
	2-CCGW120402	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.2	
	2-CCGW120404	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.4	
	2-CCGW120406	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.6	
	2-CCGW120408	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.8	
	2-CCGW120412	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	1.2	









CP Rhombic 80°
Positive 11°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH1620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	CPGW050202	●	●	●	●	●	●	1	Φ5.56	2.38	2.4	0.2	
	CPGW050204	●	●	●	●	●	●	1	Φ5.56	2.38	2.4	0.4	
	CPGW050206	●	●	●	●	●	●	1	Φ5.56	2.38	2.4	0.6	
Single-tip insert													
	CPGW060202	●	●	●	●	●	●	1	Φ6.35	2.38	2.8	0.2	
	CPGW060204	●	●	●	●	●	●	1	Φ6.35	2.38	2.8	0.4	
	CPGW060208	●	●	●	●	●	●	1	Φ6.35	2.38	2.8	0.8	
Multi-tip insert													
	2-CPGW060202	●	●	●	●	●	●	2	Φ6.35	2.38	2.8	0.2	
	2-CPGW060204	●	●	●	●	●	●	2	Φ6.35	2.38	2.8	0.4	
	2-CPGW060208	●	●	●	●	●	●	2	Φ6.35	2.38	2.8	0.8	
Single-tip insert													
	CPGW080202	●	●	●	●	●	●	1	Φ7.94	2.38	2.8	0.2	
	CPGW080204	●	●	●	●	●	●	1	Φ7.94	2.38	2.8	0.4	
	CPGW080206	●	●	●	●	●	●	1	Φ7.94	2.38	2.8	0.6	
	CPGW080208	●	●	●	●	●	●	1	Φ7.94	2.38	2.8	0.8	
Multi-tip insert													
	2-CPGW080202	●	●	●	●	●	●	2	Φ7.94	2.38	2.8	0.2	
	2-CPGW080204	●	●	●	●	●	●	2	Φ7.94	2.38	2.8	0.4	
	2-CPGW080206	●	●	●	●	●	●	2	Φ7.94	2.38	2.8	0.6	
	2-CPGW080208	●	●	●	●	●	●	2	Φ7.94	2.38	2.8	0.8	
Single-tip insert													
	CPGW090302	●	●	●	●	●	●	1	Φ9.525	3.18	4.4	0.2	
	CPGW090304	●	●	●	●	●	●	1	Φ9.525	3.18	4.4	0.4	
	CPGW090306	●	●	●	●	●	●	1	Φ9.525	3.18	4.4	0.6	
	CPGW090308	●	●	●	●	●	●	1	Φ9.525	3.18	4.4	0.8	





CP Rhombic 80°
Positive 11°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	2-CPGW090302	●	●	●	●	●	●	2	Φ9.525	3.18	4.4	0.2	
	2-CPGW090304	●	●	●	●	●	●	2	Φ9.525	3.18	4.4	0.4	
	2-CPGW090306	●	●	●	●	●	●	2	Φ9.525	3.18	4.4	0.6	
	2-CPGW090308	●	●	●	●	●	●	2	Φ9.525	3.18	4.4	0.8	
Single-tip insert													
	CPGW09T302	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.2	
	CPGW09T304	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.4	
	CPGW09T306	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.6	
	CPGW09T308	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.8	
Multi-tip insert													
	2-CPGW09T302	●	●	●	●	●	●	2	Φ9.525	3.97	4.4	0.2	
	2-CPGW09T304	●	●	●	●	●	●	2	Φ9.525	3.97	4.4	0.4	
	2-CPGW09T306	●	●	●	●	●	●	2	Φ9.525	3.97	4.4	0.6	
	2-CPGW09T308	●	●	●	●	●	●	2	Φ9.525	3.97	4.4	0.8	
Single-tip insert													
	CPGW120402	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.2	
	CPGW120404	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.4	
	CPGW120406	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.6	
	CPGW120408	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.8	
	CPGW120410	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	1.0	
	CPGW120412	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	1.2	








CP Rhombic 80°
Positive 11°

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Multi-tip insert															
	2-CPGW120402	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.2	
	2-CPGW120404	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.4	
	2-CPGW120406	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.6	
	2-CPGW120408	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.8	
	2-CPGW120410	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	1.0	
	2-CPGW120412	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	1.2	







Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

DN Rhombic 55°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	DNGA110402	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.2	
	DNGA110404	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.4	
	DNGA110406	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.6	
	DNGA110408	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.8	
Multi-tip insert													
	2-DNGA110402	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	0.2	
	2-DNGA110404	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	0.4	
	2-DNGA110406	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	0.6	
	2-DNGA110408	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	0.8	
	4-DNGA110402	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	0.2	
	4-DNGA110404	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	0.4	
	4-DNGA110406	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	0.6	
	4-DNGA110408	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	0.8	
Single-tip insert													
	DNGA150402	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.2	
	DNGA150404	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.4	
	DNGA150406	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.6	
	DNGA150408	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.8	
	DNGA150410	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	1.0	
	DNGA150412	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	1.2	
	DNGA150416	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	1.6	

DN Rhombic 55°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	2-DNGA150402	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.2	
	2-DNGA150404	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.4	
	2-DNGA150406	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.6	
	2-DNGA150408	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.8	
	2-DNGA150410	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	1.0	
	2-DNGA150412	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	1.2	
	2-DNGA150416	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	1.6	
	4-DNGA150402	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.2	
	4-DNGA150404	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.4	
	4-DNGA150406	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.6	
	4-DNGA150408	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.8	
	4-DNGA150410	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.0	
	4-DNGA150412	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.2	
	4-DNGA150416	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.6	
Single-tip insert													
	DNGA150604	●	●	●	●	●	●	1	Φ12.7	6.35	5.16	0.4	
	DNGA150606	●	●	●	●	●	●	1	Φ12.7	6.35	5.16	0.6	
	DNGA150608	●	●	●	●	●	●	1	Φ12.7	6.35	5.16	0.8	
	DNGA150610	●	●	●	●	●	●	1	Φ12.7	6.35	5.16	1.0	
	DNGA150612	●	●	●	●	●	●	1	Φ12.7	6.35	5.16	1.2	
	DNGA150616	●	●	●	●	●	●	1	Φ12.7	6.35	5.16	1.6	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder







Threading

Parting / Grooving





Miniature Tool

DN Rhombic 55°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700								
Multi-tip insert																
	2-DNGA150604	●	●	●	●				●	●	2	Φ12.7	6.35	5.16	0.4	
	2-DNGA150606	●	●	●	●				●	●	2	Φ12.7	6.35	5.16	0.6	
	2-DNGA150608	●	●	●	●				●	●	2	Φ12.7	6.35	5.16	0.8	
	2-DNGA150610	●	●	●	●				●	●	2	Φ12.7	6.35	5.16	1.0	
	2-DNGA150612	●	●	●	●				●	●	2	Φ12.7	6.35	5.16	1.2	
	2-DNGA150616	●	●	●	●				●	●	2	Φ12.7	6.35	5.16	1.6	
Multi-tip insert																
	4-DNGA150604	●	●	●	●				●	●	4	Φ12.7	6.35	5.16	0.4	
	4-DNGA150606	●	●	●	●				●	●	4	Φ12.7	6.35	5.16	0.6	
	4-DNGA150608	●	●	●	●				●	●	4	Φ12.7	6.35	5.16	0.8	
	4-DNGA150610	●	●	●	●				●	●	4	Φ12.7	6.35	5.16	1.0	
	4-DNGA150612	●	●	●	●				●	●	4	Φ12.7	6.35	5.16	1.2	
	4-DNGA150616	●	●	●	●				●	●	4	Φ12.7	6.35	5.16	1.6	
Single-tip insert																
	DNGA190606	●	●	●	●				●	●	1	Φ15.875	6.35	6.35	0.6	
	DNGA190608	●	●	●	●				●	●	1	Φ15.875	6.35	6.35	0.8	
	DNGA190610	●	●	●	●				●	●	1	Φ15.875	6.35	6.35	1.0	
	DNGA190612	●	●	●	●				●	●	1	Φ15.875	6.35	6.35	1.2	
	DNGA190616	●	●	●	●				●	●	1	Φ15.875	6.35	6.35	1.6	











DN Rhombic 55°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700							
Multi-tip insert														
	2-DNGA190606	●	●	●	●		●	●	2	Φ15.875	6.35	6.35	0.6	
	2-DNGA190608	●	●	●	●		●	●	2	Φ15.875	6.35	6.35	0.8	
	2-DNGA190610	●	●	●	●		●	●	2	Φ15.875	6.35	6.35	1.0	
	2-DNGA190612	●	●	●	●		●	●	2	Φ15.875	6.35	6.35	1.2	
	2-DNGA190616	●	●	●	●		●	●	2	Φ15.875	6.35	6.35	1.6	
	4-DNGA190606	●	●	●	●		●	●	4	Φ15.875	6.35	6.35	0.6	
	4-DNGA190608	●	●	●	●		●	●	4	Φ15.875	6.35	6.35	0.8	
	4-DNGA190610	●	●	●	●		●	●	4	Φ15.875	6.35	6.35	1.0	
	4-DNGA190612	●	●	●	●		●	●	4	Φ15.875	6.35	6.35	1.2	
	4-DNGA190616	●	●	●	●		●	●	4	Φ15.875	6.35	6.35	1.6	











Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

DC Rhombic 55°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700							
Single-tip insert														
	DCGW070202	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.2	
	DCGW070204	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.4	
	DCGW070206	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.6	
	DCGW070208	●	●	●	●		●	●	1	Φ6.35	2.3	2.8	0.8	
Multi-tip insert														
	2-DCGW070202	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.2	
	2-DCGW070204	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.4	
	2-DCGW070206	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.6	
	2-DCGW070208	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.8	
Single-tip insert														
	DCGW090202	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.2	
	DCGW090204	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.4	
	DCGW090206	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.6	
	DCGW090208	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.8	
Multi-tip insert														
	2-DCGW090202	●	●	●	●		●	●	2	Φ7.94	2.38	3.4	0.2	
	2-DCGW090204	●	●	●	●		●	●	2	Φ7.94	2.38	3.4	0.4	
	2-DCGW090206	●	●	●	●		●	●	2	Φ7.94	2.38	3.4	0.6	
	2-DCGW090208	●	●	●	●		●	●	2	Φ7.94	2.38	3.4	0.8	
Single-tip insert														
	DCGW110302	●	●	●	●		●	●	1	Φ9.525	3.18	3.4	0.2	
	DCGW110304	●	●	●	●		●	●	1	Φ9.525	3.18	3.4	0.4	
	DCGW110306	●	●	●	●		●	●	1	Φ9.525	3.18	3.4	0.6	
	DCGW110308	●	●	●	●		●	●	1	Φ9.525	3.18	3.4	0.8	

DC Rhombic 55°
Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700							
Multi-tip insert														
	2-DCGW110302	●	●	●	●		●	●	2	Φ9.525	3.18	3.4	0.2	
	2-DCGW110304	●	●	●	●		●	●	2	Φ9.525	3.18	3.4	0.4	
	2-DCGW110306	●	●	●	●		●	●	2	Φ9.525	3.18	3.4	0.6	
	2-DCGW110308	●	●	●	●		●	●	2	Φ9.525	3.18	3.4	0.8	
Single-tip insert														
	DCGW11T302	●	●	●	●		●	●	1	Φ9.525	3.97	4.4	0.2	
	DCGW11T304	●	●	●	●		●	●	1	Φ9.525	3.97	4.4	0.4	
	DCGW11T306	●	●	●	●		●	●	1	Φ9.525	3.97	4.4	0.6	
	DCGW11T308	●	●	●	●		●	●	1	Φ9.525	3.97	4.4	0.8	
Multi-tip insert														
	2-DCGW11T302	●	●	●	●		●	●	2	Φ9.525	3.97	4.4	0.2	
	2-DCGW11T304	●	●	●	●		●	●	2	Φ9.525	3.97	4.4	0.4	
	2-DCGW11T306	●	●	●	●		●	●	2	Φ9.525	3.97	4.4	0.6	
	2-DCGW11T308	●	●	●	●		●	●	2	Φ9.525	3.97	4.4	0.8	
Single-tip insert														
	DCGW110402	●	●	●	●		●	●	1	Φ9.525	4.76	4.5	0.2	
	DCGW110404	●	●	●	●		●	●	1	Φ9.525	4.76	4.5	0.4	
	DCGW110406	●	●	●	●		●	●	1	Φ9.525	4.76	4.5	0.6	
	DCGW110408	●	●	●	●		●	●	1	Φ9.525	4.76	4.5	0.8	
Multi-tip insert														
	2-DCGW110402	●	●	●	●		●	●	2	Φ9.525	4.76	3.4	0.2	
	2-DCGW110404	●	●	●	●		●	●	2	Φ9.525	4.76	4.5	0.4	
	2-DCGW110406	●	●	●	●		●	●	2	Φ9.525	4.76	4.5	0.6	
	2-DCGW110408	●	●	●	●		●	●	2	Φ9.525	4.76	4.5	0.8	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder





Threading

Parting, Grooving











Miniature Tool

DC Rhombic 55°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	DCGW150404	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	0.4	
	DCGW150406	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	0.6	
	DCGW150408	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	0.8	
	DCGW150410	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	1.0	
	DCGW150412	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	1.2	
	DCGW150416	●	●	●	●			●	●	1	Φ12.7	4.76	5.5	1.6	
Multi-tip insert															
	2-DCGW150404	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.4	
	2-DCGW150406	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.6	
	2-DCGW150408	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	0.8	
	2-DCGW150410	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	1.0	
	2-DCGW150412	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	1.2	
	2-DCGW150416	●	●	●	●			●	●	2	Φ12.7	4.76	5.5	1.6	









DP Rhombic 55°
Positive 11°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700							
Single-tip insert														
	DPGW070202	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.2	
	DPGW070204	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.4	
	DPGW070206	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.6	
	DPGW070208	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.8	
Multi-tip insert														
	2-DPGW070202	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.2	
	2-DPGW070204	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.4	
	2-DPGW070206	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.6	
	2-DPGW070208	●	●	●	●		●	●	2	Φ6.35	2.38	2.8	0.8	
Single-tip insert														
	DPGW090202	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.2	
	DPGW090204	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.4	
	DPGW090206	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.6	
	DPGW090208	●	●	●	●		●	●	1	Φ7.94	2.38	3.4	0.8	
Multi-tip insert														
	2-DPGW090202	●	●	●	●		●	●	2	Φ7.94	2.38	3.4	0.2	
	2-DPGW090204	●	●	●	●		●	●	2	Φ7.94	2.38	3.4	0.4	
	2-DPGW090206	●	●	●	●		●	●	2	Φ7.94	2.38	3.4	0.6	
	2-DPGW090208	●	●	●	●		●	●	2	Φ7.94	2.38	3.4	0.8	
Single-tip insert														
	DPGW110302	●	●	●	●		●	●	1	Φ9.525	3.18	3.4	0.2	
	DPGW110304	●	●	●	●		●	●	1	Φ9.525	3.18	3.4	0.4	
	DPGW110306	●	●	●	●		●	●	1	Φ9.525	3.18	3.4	0.6	
	DPGW110308	●	●	●	●		●	●	1	Φ9.525	3.18	3.4	0.8	







Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Treading
Parting / Grooving
Miniature Tool

DP Rhombic 55°
Positive 11°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Multi-tip insert															
	2-DPGW110302	●	●	●	●			●	●	2	Φ9.525	3.18	3.4	0.2	
	2-DPGW110304	●	●	●	●			●	●	2	Φ9.525	3.18	3.4	0.4	
	2-DPGW110306	●	●	●	●			●	●	2	Φ9.525	3.18	3.4	0.6	
	2-DPGW110308	●	●	●	●			●	●	2	Φ9.525	3.18	3.4	0.8	
Single-tip insert															
	DPGW11T302	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.2	
	DPGW11T304	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.4	
	DPGW11T306	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.6	
	DPGW11T308	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.8	
Multi-tip insert															
	2-DPGW11T302	●	●	●	●			●	●	2	Φ9.525	3.97	4.4	0.2	
	2-DPGW11T304	●	●	●	●			●	●	2	Φ9.525	3.97	4.4	0.4	
	2-DPGW11T306	●	●	●	●			●	●	2	Φ9.525	3.97	4.4	0.6	
	2-DPGW11T308	●	●	●	●			●	●	2	Φ9.525	3.97	4.4	0.8	
Single-tip insert															
	DPGW110402	●	●	●	●			●	●	1	Φ9.525	4.76	4.5	0.2	
	DPGW110404	●	●	●	●			●	●	1	Φ9.525	4.76	4.5	0.4	
	DPGW110406	●	●	●	●			●	●	1	Φ9.525	4.76	4.5	0.6	
	DPGW110408	●	●	●	●			●	●	1	Φ9.525	4.76	4.5	0.8	




DP Rhombic 55°
Positive 11°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	2-DPGW110402	●	●	●	●	●	●	2	Φ9.525	4.76	3.4	0.2	
	2-DPGW110404	●	●	●	●	●	●	2	Φ9.525	4.76	3.4	0.4	
	2-DPGW110406	●	●	●	●	●	●	2	Φ9.525	4.76	3.4	0.6	
	2-DPGW110408	●	●	●	●	●	●	2	Φ9.525	4.76	3.4	0.8	
Single-tip insert													
	DPGW150404	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.4	
	DPGW150406	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.6	
	DPGW150408	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.8	
	DPGW150410	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	1.0	
	DPGW150412	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	1.2	
	DPGW150416	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	1.6	
Multi-tip insert													
	2-DPGW150404	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	0.4	
	2-DPGW150406	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	0.6	
	2-DPGW150408	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	0.8	
	2-DPGW150410	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	1.0	
	2-DPGW150412	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	1.2	
	2-DPGW150416	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	1.6	







Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting / Grooving
Miniature Tool

VN Rhombic 35°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	VNGA160402	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.2	
	VNGA160404	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.4	
	VNGA160406	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.6	
	VNGA160408	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.8	
	VNGA160410	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	1.0	
	VNGA160412	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	1.2	
Multi-tip insert													
	2-VNGA160402	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	0.2	
	2-VNGA160404	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	0.4	
	2-VNGA160406	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	0.6	
	2-VNGA160408	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	0.8	
	2-VNGA160410	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	1.0	
	2-VNGA160412	●	●	●	●	●	●	2	Φ9.525	4.76	3.8	1.2	
	4-VNGA160402	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	0.2	
	4-VNGA160404	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	0.4	
	4-VNGA160406	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	0.6	
	4-VNGA160408	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	0.8	
	4-VNGA160410	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	1.0	
	4-VNGA160412	●	●	●	●	●	●	4	Φ9.525	4.76	3.8	1.2	









VN Rhombic 35°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	VNGA220410	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	1.0	
	VNGA220412	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	1.2	
	VNGA220416	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	1.6	
	VNGA220404	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.4	
	VNGA220408	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.8	
Multi-tip insert													
	2-VNGA220404	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.4	
	2-VNGA220408	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.8	
	2-VNGA220410	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	1.0	
	2-VNGA220412	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	1.2	
	2-VNGA220416	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	1.6	
	4-VNGA220404	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.4	
	4-VNGA220408	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.8	
	4-VNGA220410	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.0	
	4-VNGA220412	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.2	
	4-VNGA220416	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.6	











Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Treading
Parting, Grooving
Miniature Tool

VB Rhombic 35°
Positive 5°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	VBGW110302	●	●	●	●			●	●	1	Φ6.35	3.18	2.8	0.2	
	VBGW110304	●	●	●	●			●	●	1	Φ6.35	3.18	2.8	0.4	
	VBGW110306	●	●	●	●			●	●	1	Φ6.35	3.18	2.8	0.6	
	VBGW110308	●	●	●	●			●	●	1	Φ6.35	3.18	2.8	0.8	
Multi-tip insert															
	2-VBGW110302	●	●	●	●			●	●	2	Φ6.35	3.18	2.8	0.2	
	2-VBGW110304	●	●	●	●			●	●	2	Φ6.35	3.18	2.8	0.4	
	2-VBGW110306	●	●	●	●			●	●	2	Φ6.35	3.18	2.8	0.6	
	2-VBGW110308	●	●	●	●			●	●	2	Φ6.35	3.18	2.8	0.8	
Single-tip insert															
	VBGW160404	●	●	●	●			●	●	1	Φ9.525	4.76	4.4	0.4	
	VBGW160406	●	●	●	●			●	●	1	Φ9.525	4.76	4.4	0.6	
	VBGW160408	●	●	●	●			●	●	1	Φ9.525	4.76	4.4	0.8	
	VBGW160410	●	●	●	●			●	●	1	Φ9.525	4.76	4.4	1.0	
	VBGW160412	●	●	●	●			●	●	1	Φ9.525	4.76	4.4	1.2	
Multi-tip insert															
	2-VBGW160404	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	0.4	
	2-VBGW160406	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	0.6	
	2-VBGW160408	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	0.8	
	2-VBGW160410	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	1.0	
	2-VBGW160412	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	1.2	

VC Rhombic 35°
Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	VCGW080202	●	●	●	●	●	●	1	Φ4.76	2.38	2.3	0.2	
	VCGW080204	●	●	●	●	●	●	1	Φ4.76	2.38	2.3	0.4	
	VCGW080206	●	●	●	●	●	●	1	Φ4.76	2.38	2.3	0.6	
	VCGW080208	●	●	●	●	●	●	1	Φ4.76	2.38	2.3	0.8	
Multi-tip insert													
	2-VCGW080202	●	●	●	●	●	●	2	Φ4.76	2.38	2.3	0.2	
	2-VCGW080204	●	●	●	●	●	●	2	Φ4.76	2.38	2.3	0.4	
	2-VCGW080206	●	●	●	●	●	●	2	Φ4.76	2.38	2.3	0.6	
	2-VCGW080208	●	●	●	●	●	●	2	Φ4.76	2.38	2.3	0.8	
Single-tip insert													
	VCGW110302	●	●	●	●	●	●	1	Φ6.35	3.18	2.8	0.2	
	VCGW110304	●	●	●	●	●	●	1	Φ6.35	3.18	2.8	0.4	
	VCGW110306	●	●	●	●	●	●	1	Φ6.35	3.18	2.8	0.6	
	VCGW110308	●	●	●	●	●	●	1	Φ6.35	3.18	2.8	0.8	
Multi-tip insert													
	2-VCGW110302	●	●	●	●	●	●	2	Φ6.35	3.18	2.8	0.2	
	2-VCGW110304	●	●	●	●	●	●	2	Φ6.35	3.18	2.8	0.4	
	2-VCGW110306	●	●	●	●	●	●	2	Φ6.35	3.18	2.8	0.6	
	2-VCGW110308	●	●	●	●	●	●	2	Φ6.35	3.18	2.8	0.8	
Single-tip insert													
	VCGW160404	●	●	●	●	●	●	1	Φ9.525	4.67	4.4	0.4	
	VCGW160406	●	●	●	●	●	●	1	Φ9.525	4.67	4.4	0.6	
	VCGW160408	●	●	●	●	●	●	1	Φ9.525	4.67	4.4	0.8	
	VCGW160410	●	●	●	●	●	●	1	Φ9.525	4.67	4.4	1.0	
	VCGW160412	●	●	●	●	●	●	1	Φ9.525	4.67	4.4	1.2	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder







Treading

Parting, Grooving


Miniature Tool

VC Rhombic 35°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Multi-tip insert															
	2-VCGW160404	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	0.4	
	2-VCGW160406	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	0.6	
	2-VCGW160408	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	0.8	
	2-VCGW160410	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	1.0	
	2-VCGW160412	●	●	●	●			●	●	2	Φ9.525	4.76	4.4	1.2	
Single-tip insert															
	VCMW220512	●	●	●	●			●	●	1	Φ12.7	5.56	5.5	1.2	
	VCMW220516	●	●	●	●			●	●	1	Φ12.7	5.56	5.5	1.6	
	VCMW220520	●	●	●	●			●	●	1	Φ12.7	5.56	5.5	2.0	
Multi-tip insert															
	2-VCMW220512	●	●	●	●			●	●	2	Φ12.7	5.56	5.5	1.2	
	2-VCMW220516	●	●	●	●			●	●	2	Φ12.7	5.56	5.5	1.6	
	2-VCMW220520	●	●	●	●			●	●	2	Φ12.7	5.56	5.5	2.0	

VP Rhombic 35°
Positive 11°

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	VPGW080202	●	●	●	●			●	●	1	Φ4.76	2.38	2.3	0.2	
	VPGW080204	●	●	●	●			●	●	1	Φ4.76	2.38	2.3	0.4	
	VPGW080208	●	●	●	●			●	●	1	Φ4.76	2.38	2.3	0.8	
Multi-tip insert															
	2-VPGW080204	●	●	●	●			●	●	2	Φ4.76	2.38	2.3	0.4	
	2-VPGW080208	●	●	●	●			●	●	2	Φ4.76	2.38	2.3	0.8	
Single-tip insert															
	VPGW110302	●	●	●	●			●	●	1	Φ6.35	3.18	2.8	0.2	
	VPGW110304	●	●	●	●			●	●	1	Φ6.35	3.18	2.8	0.4	
	VPGW110306	●	●	●	●			●	●	1	Φ6.35	3.18	2.8	0.6	
	VPGW110308	●	●	●	●			●	●	1	Φ6.35	3.18	2.8	0.8	
Multi-tip insert															
	2-VPGW110302	●	●	●	●			●	●	2	Φ6.35	3.18	2.8	0.2	
	2-VPGW110304	●	●	●	●			●	●	2	Φ6.35	3.18	2.8	0.4	
	2-VPGW110306	●	●	●	●			●	●	2	Φ6.35	3.18	2.8	0.6	
	2-VPGW110308	●	●	●	●			●	●	2	Φ6.35	3.18	2.8	0.8	











Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Treading
Parting, Grooving
Miniature Tool

TN Triangular 60°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	TNGA110302	●	●	●	●	●	●	1	Φ6.35	3.18	2.3	0.2	
	TNGA110304	●	●	●	●	●	●	1	Φ6.35	3.18	2.3	0.4	
	TNGA110306	●	●	●	●	●	●	1	Φ6.35	3.18	2.3	0.6	
	TNGA110308	●	●	●	●	●	●	1	Φ6.35	3.18	2.3	0.8	
Multi-tip insert													
	3-TNGA110302	●	●	●	●	●	●	3	Φ6.35	3.18	2.3	0.2	
	3-TNGA110304	●	●	●	●	●	●	3	Φ6.35	3.18	2.3	0.4	
	3-TNGA110306	●	●	●	●	●	●	3	Φ6.35	3.18	2.3	0.6	
	3-TNGA110308	●	●	●	●	●	●	3	Φ6.35	3.18	2.3	0.8	
Single-tip insert													
	TNGA130304	●	●	●	●	●	●	1	Φ7.95	3.18	3.15	0.4	
	TNGA130306	●	●	●	●	●	●	1	Φ7.95	3.18	3.15	0.6	
	TNGA130308	●	●	●	●	●	●	1	Φ7.95	3.18	3.15	0.8	
	TNGA130312	●	●	●	●	●	●	1	Φ7.95	3.18	3.15	1.2	
Multi-tip insert													
	3-TNGA130304	●	●	●	●	●	●	3	Φ7.95	3.18	3.15	0.4	
	3-TNGA130306	●	●	●	●	●	●	3	Φ7.95	3.18	3.15	0.6	
	3-TNGA130308	●	●	●	●	●	●	3	Φ7.95	3.18	3.15	0.8	
	3-TNGA130312	●	●	●	●	●	●	3	Φ7.95	3.18	3.15	1.2	
Single-tip insert													
	TNGA160404	●	●	●	●	●	●	1	Φ9.525	4.46	3.8	0.4	
	TNGA160406	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.6	
	TNGA160408	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	0.8	
	TNGA160410	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	1.0	
	TNGA160412	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	1.2	
	TNGA160416	●	●	●	●	●	●	1	Φ9.525	4.76	3.8	1.6	







TN Triangular 60°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	3-TNGA160404	●	●	●	●	●	●	3	Φ9.525	4.76	3.8	0.4	
	3-TNGA160406	●	●	●	●	●	●	3	Φ9.525	4.76	3.8	0.6	
	3-TNGA160408	●	●	●	●	●	●	3	Φ9.525	4.76	3.8	0.8	
	3-TNGA160410	●	●	●	●	●	●	3	Φ9.525	4.76	3.8	1.0	
	3-TNGA160412	●	●	●	●	●	●	3	Φ9.525	4.76	3.8	1.2	
	3-TNGA160416	●	●	●	●	●	●	3	Φ9.525	4.76	3.8	1.6	
Multi-tip insert													
	6-TNGA160404	●	●	●	●	●	●	6	Φ9.525	4.76	3.8	0.4	
	6-TNGA160406	●	●	●	●	●	●	6	Φ9.525	4.76	3.8	0.6	
	6-TNGA160408	●	●	●	●	●	●	6	Φ9.525	4.76	3.8	0.8	
	6-TNGA160410	●	●	●	●	●	●	6	Φ9.525	4.76	3.8	1.0	
	6-TNGA160412	●	●	●	●	●	●	6	Φ9.525	4.76	3.8	1.2	
	6-TNGA160416	●	●	●	●	●	●	6	Φ9.525	4.76	3.8	1.6	
Single-tip insert													
	TNGA220408	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	0.8	
	TNGA220412	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	1.2	
	TNGA220416	●	●	●	●	●	●	1	Φ12.7	4.76	5.16	1.6	
Multi-tip insert													
	3-TNGA220408	●	●	●	●	●	●	3	Φ12.7	4.76	5.16	0.8	
	3-TNGA220412	●	●	●	●	●	●	3	Φ12.7	4.76	5.16	1.2	
	3-TNGA220416	●	●	●	●	●	●	3	Φ12.7	4.76	5.16	1.6	
Multi-tip insert													
	6-TNGA220408	●	●	●	●	●	●	6	Φ12.7	4.76	5.16	0.8	
	6-TNGA220412	●	●	●	●	●	●	6	Φ12.7	4.76	5.16	1.2	
	6-TNGA220416	●	●	●	●	●	●	6	Φ12.7	4.76	5.16	1.6	





TN Triangular 60°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBK100	TCBK100						
Single-tip insert													
	TNGA270608	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	0.8	
	TNGA270610	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	1.0	
	TNGA270612	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	1.2	
	TNGA270616	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	1.6	
	TNGA270620	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	2.0	
Multi-tip insert													
	3-TNGA270608	●	●	●	●	●	●	3	Φ15.875	6.35	6.35	0.8	
	3-TNGA270610	●	●	●	●	●	●	3	Φ15.875	6.35	6.35	1.0	
	3-TNGA270612	●	●	●	●	●	●	3	Φ15.875	6.35	6.35	1.2	
	3-TNGA270616	●	●	●	●	●	●	3	Φ15.875	6.35	6.35	1.6	
	3-TNGA270620	●	●	●	●	●	●	3	Φ15.875	6.35	6.35	2.0	
Multi-tip insert													
	6-TNGA270608	●	●	●	●	●	●	6	Φ15.875	6.35	6.35	0.8	
	6-TNGA270610	●	●	●	●	●	●	6	Φ15.875	6.35	6.35	1.0	
	6-TNGA270612	●	●	●	●	●	●	6	Φ15.875	6.35	6.35	1.2	
	6-TNGA270616	●	●	●	●	●	●	6	Φ15.875	6.35	6.35	1.6	
	6-TNGA270620	●	●	●	●	●	●	6	Φ15.875	6.35	6.35	2.0	











TB Triangular 60°
Positive 5°

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700								
Single-tip insert																
	TBGW060102	●	●	●	●			●	●		1	Φ3.97	1.59	2.2	0.2	
	TBGW060104	●	●	●	●			●	●		1	Φ3.97	1.59	2.2	0.4	











Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

TC Triangular 60°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	TCGW060102	●	●	●	●			●	●	1	Φ3.97	1.59	2.2	0.2	
	TCGW060104	●	●	●	●			●	●	1	Φ3.97	1.59	2.2	0.4	
Single-tip insert															
	TCGW06T102	●	●	●	●			●	●	1	Φ3.97	1.98	2.2	0.2	
	TCGW06T104	●	●	●	●			●	●	1	Φ3.97	1.98	2.2	0.4	
Single-tip insert															
	TCGW060202	●	●	●	●			●	●	1	Φ3.97	2.38	2.2	0.2	
	TCGW060204	●	●	●	●			●	●	1	Φ3.97	2.38	2.2	0.4	
Single-tip insert															
	TCGW080202	●	●	●	●			●	●	1	Φ4.76	2.38	2.3	0.2	
	TCGW080204	●	●	●	●			●	●	1	Φ4.76	2.38	2.3	0.4	
	TCGW080206	●	●	●	●			●	●	1	Φ4.76	2.38	2.3	0.6	
Single-tip insert															
	TCGW090202	●	●	●	●			●	●	1	Φ5.56	2.38	2.5	0.2	
	TCGW090204	●	●	●	●			●	●	1	Φ5.56	2.38	2.5	0.4	
	TCGW090206	●	●	●	●			●	●	1	Φ5.56	2.38	2.5	0.6	
	TCGW090208	●	●	●	●			●	●	1	Φ5.56	2.38	2.5	0.8	

TC Triangular 60°
Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700							
Multi-tip insert														
	3-TCGW090202	●	●	●	●		●	●	3	Φ5.56	2.38	2.5	0.2	
	3-TCGW090204	●	●	●	●		●	●	3	Φ5.56	2.38	2.5	0.4	
	3-TCGW090206	●	●	●	●		●	●	3	Φ5.56	2.38	2.5	0.6	
	3-TCGW090208	●	●	●	●		●	●	3	Φ5.56	2.38	2.5	0.8	
Single-tip insert														
	TCGW110202	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.2	
	TCGW110204	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.4	
	TCGW110206	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.6	
	TCGW110208	●	●	●	●		●	●	1	Φ6.35	2.38	2.8	0.8	
Multi-tip insert														
	3-TCGW110202	●	●	●	●		●	●	3	Φ6.35	2.38	2.8	0.2	
	3-TCGW110204	●	●	●	●		●	●	3	Φ6.35	2.38	2.8	0.4	
	3-TCGW110206	●	●	●	●		●	●	3	Φ6.35	2.38	2.8	0.6	
	3-TCGW110208	●	●	●	●		●	●	3	Φ6.35	2.38	2.8	0.8	
Single-tip insert														
	TCGW110302	●	●	●	●		●	●	1	Φ6.35	3.18	2.8	0.2	
	TCGW110304	●	●	●	●		●	●	1	Φ6.35	3.18	2.8	0.4	
	TCGW110306	●	●	●	●		●	●	1	Φ6.35	3.18	2.8	0.6	
	TCGW110308	●	●	●	●		●	●	1	Φ6.35	3.18	2.8	0.8	
Multi-tip insert														
	3-TCGW110302	●	●	●	●		●	●	3	Φ6.35	3.18	2.8	0.2	
	3-TCGW110304	●	●	●	●		●	●	3	Φ6.35	3.18	2.8	0.4	
	3-TCGW110306	●	●	●	●		●	●	3	Φ6.35	3.18	2.8	0.6	
	3-TCGW110308	●	●	●	●		●	●	3	Φ6.35	3.18	2.8	0.8	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder









Treading

Parting, Grooving



Miniature Tool

TC Triangular 60°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700								
Single-tip insert																
	TCGW11T304	●	●	●	●				●	●	1	Φ6.35	3.97	2.8	0.4	
	TCGW11T306	●	●	●	●				●	●	1	Φ6.35	3.97	2.8	0.6	
	TCGW11T308	●	●	●	●				●	●	1	Φ6.35	3.97	2.8	0.8	
Single-tip insert																
	TCGW16T304	●	●	●	●				●	●	1	Φ9.525	3.97	4.4	0.4	
	TCGW16T306	●	●	●	●				●	●	1	Φ9.525	3.97	4.4	0.6	
	TCGW16T308	●	●	●	●				●	●	1	Φ9.525	3.97	4.4	0.8	
	TCGW16T310	●	●	●	●				●	●	1	Φ9.525	3.97	4.4	1.0	
	TCGW16T312	●	●	●	●				●	●	1	Φ9.525	3.97	4.4	1.2	
Multi-tip insert																
	3-TCGW16T304	●	●	●	●				●	●	3	Φ9.525	3.97	4.4	0.4	
	3-TCGW16T306	●	●	●	●				●	●	3	Φ9.525	3.97	4.4	0.6	
	3-TCGW16T308	●	●	●	●				●	●	3	Φ9.525	3.97	4.4	0.8	
	3-TCGW16T310	●	●	●	●				●	●	3	Φ9.525	3.97	4.4	1.0	
	3-TCGW16T312	●	●	●	●				●	●	3	Φ9.525	3.97	4.4	1.2	
Single-tip insert																
	TCGW160404	●	●	●	●				●	●	1	Φ9.525	4.76	4.4	0.4	
	TCGW160406	●	●	●	●				●	●	1	Φ9.525	4.76	4.4	0.6	
	TCGW160408	●	●	●	●				●	●	1	Φ9.525	4.76	4.4	0.8	
	TCGW160410	●	●	●	●				●	●	1	Φ9.525	4.76	4.4	1.0	
	TCGW160412	●	●	●	●				●	●	1	Φ9.525	4.76	4.4	1.2	











TC Triangular 60°
Positive 7°

Insert shape	Designation	Material code							Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Multi-tip insert															
	3-TCGW160404	●	●	●	●			●	●	3	Φ9.525	4.76	4.4	0.4	
	3-TCGW160406	●	●	●	●			●	●	3	Φ9.525	4.76	4.4	0.6	
	3-TCGW160408	●	●	●	●			●	●	3	Φ9.525	4.76	4.4	0.8	
	3-TCGW160410	●	●	●	●			●	●	3	Φ9.525	4.76	4.4	1.0	
	3-TCGW160412	●	●	●	●			●	●	3	Φ9.525	4.76	4.4	1.2	











Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

TP Triangular 60°
Positive 11°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	TPGW080202	●	●	●	●	●	●	1	Φ4.76	2.38	2.4	0.2	
	TPGW080204	●	●	●	●	●	●	1	Φ4.76	2.38	2.4	0.4	
	TPGW080206	●	●	●	●	●	●	1	Φ4.76	2.38	2.4	0.6	
Single-tip insert													
	TPGW090202	●	●	●	●	●	●	1	Φ5.56	2.38	2.8	0.2	
	TPGW090204	●	●	●	●	●	●	1	Φ5.56	2.38	2.8	0.4	
	TPGW090206	●	●	●	●	●	●	1	Φ5.56	2.38	2.8	0.6	
	TPGW090208	●	●	●	●	●	●	1	Φ5.56	2.38	2.8	0.8	
Single-tip insert													
	TPGW110202	●	●	●	●	●	●	1	Φ6.35	2.38	2.8	0.2	
	TPGW110204	●	●	●	●	●	●	1	Φ6.35	2.38	2.8	0.4	
	TPGW110206	●	●	●	●	●	●	1	Φ6.35	2.38	2.8	0.6	
	TPGW110208	●	●	●	●	●	●	1	Φ6.35	2.38	2.8	0.8	
Multi-tip insert													
	3-TPGW110202	●	●	●	●	●	●	3	Φ6.35	2.38	2.8	0.2	
	3-TPGW110204	●	●	●	●	●	●	3	Φ6.35	2.38	2.8	0.4	
	3-TPGW110206	●	●	●	●	●	●	3	Φ6.35	2.38	2.8	0.6	
	3-TPGW110208	●	●	●	●	●	●	3	Φ6.35	2.38	2.8	0.8	
Single-tip insert													
	TPGW110302	●	●	●	●	●	●	1	Φ6.35	3.18	2.8	0.2	
	TPGW110304	●	●	●	●	●	●	1	Φ6.35	3.18	2.8	0.4	
	TPGW110306	●	●	●	●	●	●	1	Φ6.35	3.18	2.8	0.6	
	TPGW110308	●	●	●	●	●	●	1	Φ6.35	3.18	2.8	0.8	





TP Triangular 60°
Positive 11°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH1620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	3-TPGW110302	●	●	●	●	●	●	3	Φ6.35	3.18	2.8	0.2	
	3-TPGW110304	●	●	●	●	●	●	3	Φ6.35	3.18	2.8	0.4	
	3-TPGW110306	●	●	●	●	●	●	3	Φ6.35	3.18	2.8	0.6	
	3-TPGW110308	●	●	●	●	●	●	3	Φ6.35	3.18	2.8	0.8	
Single-tip insert													
	TPGW160304	●	●	●	●	●	●	1	Φ9.525	3.18	4.4	0.4	
	TPGW160306	●	●	●	●	●	●	1	Φ9.525	3.18	4.4	0.6	
	TPGW160308	●	●	●	●	●	●	1	Φ9.525	3.18	4.4	0.8	
	TPGW160312	●	●	●	●	●	●	1	Φ9.525	3.18	4.4	1.2	
Multi-tip insert													
	3-TPGW160304	●	●	●	●	●	●	3	Φ9.525	3.18	4.4	0.4	
	3-TPGW160306	●	●	●	●	●	●	3	Φ9.525	3.18	4.4	0.6	
	3-TPGW160308	●	●	●	●	●	●	3	Φ9.525	3.18	4.4	0.8	
	3-TPGW160312	●	●	●	●	●	●	3	Φ9.525	3.18	4.4	1.2	
Single-tip insert													
	TPGW16T304	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.4	
	TPGW16T306	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.6	
	TPGW16T308	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.8	
	TPGW16T312	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	1.2	
Multi-tip insert													
	3-TPGW16T304	●	●	●	●	●	●	3	Φ9.525	3.97	4.4	0.4	
	3-TPGW16T306	●	●	●	●	●	●	3	Φ9.525	3.97	4.4	0.6	
	3-TPGW16T308	●	●	●	●	●	●	3	Φ9.525	3.97	4.4	0.8	
	3-TPGW16T312	●	●	●	●	●	●	3	Φ9.525	3.97	4.4	1.2	









Insert
External Toolholder
Internal Toolholder
PSC Toolholder
T threading
Parting, Grooving
Miniature Tool

TP Triangular 60°
Positive 11°

- Insert
- External Toolholder
- Internal Toolholder
- PSC Toolholder
- Threading
- Parting , Grooving
- Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	TPGW160402	●	●	●	●	●	●	1	Φ9.525	4.76	4.4	0.2	
	TPGW160404	●	●	●	●	●	●	1	Φ9.525	4.76	4.4	0.4	
	TPGW160406	●	●	●	●	●	●	1	Φ9.525	4.76	4.4	0.6	
	TPGW160408	●	●	●	●	●	●	1	Φ9.525	4.76	4.4	0.8	
	TPGW160412	●	●	●	●	●	●	1	Φ9.525	4.76	4.4	1.2	
Multi-tip insert													
	3-TPGW160402	●	●	●	●	●	●	3	Φ9.525	4.76	4.4	0.2	
	3-TPGW160404	●	●	●	●	●	●	3	Φ9.525	4.76	4.4	0.4	
	3-TPGW160406	●	●	●	●	●	●	3	Φ9.525	4.76	4.4	0.6	
	3-TPGW160408	●	●	●	●	●	●	3	Φ9.525	4.76	4.4	0.8	
	3-TPGW160412	●	●	●	●	●	●	3	Φ9.525	4.76	4.4	1.2	

SN Square 90°
Negative

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	SNGA07T204	●	●	●	●			●	●	1	Φ7.94	2.78	3.15	0.4	
	SNGA07T206	●	●	●	●			●	●	1	Φ7.94	2.78	3.15	0.6	
	SNGA07T208	●	●	●	●			●	●	1	Φ7.94	2.78	3.15	0.8	
Single-tip insert															
	SNGA090304	●	●	●	●			●	●	1	Φ9.525	3.18	3.8	0.4	
	SNGA090306	●	●	●	●			●	●	1	Φ9.525	3.18	3.8	0.6	
	SNGA090308	●	●	●	●			●	●	1	Φ9.525	3.18	3.8	0.8	
	SNGA090310	●	●	●	●			●	●	1	Φ9.525	3.18	3.8	1.0	
	SNGA090312	●	●	●	●			●	●	1	Φ9.525	3.18	3.8	1.2	
Multi-tip insert															
	2-SNGA090304	●	●	●	●			●	●	2	Φ9.525	3.18	3.8	0.4	
	2-SNGA090306	●	●	●	●			●	●	2	Φ9.525	3.18	3.8	0.6	
	2-SNGA090308	●	●	●	●			●	●	2	Φ9.525	3.18	3.8	0.8	
	2-SNGA090310	●	●	●	●			●	●	2	Φ9.525	3.18	3.8	1.0	
	2-SNGA090312	●	●	●	●			●	●	2	Φ9.525	3.18	3.8	1.2	
Single-tip insert															
	SNGA120404	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	0.4	
	SNGA120406	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	0.6	
	SNGA120408	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	0.8	
	SNGA120410	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	1.0	
	SNGA120412	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	1.2	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder









Threading

Parting / Grooving









Miniature Tool

SN Square 90°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	2-SNGA120404	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.4	
	2-SNGA120406	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.6	
	2-SNGA120408	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	0.8	
	2-SNGA120410	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	1.0	
	2-SNGA120412	●	●	●	●	●	●	2	Φ12.7	4.76	5.16	1.2	
Multi-tip insert													
	4-SNGA120404	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.4	
	4-SNGA120406	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.6	
	4-SNGA120408	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	0.8	
	4-SNGA120410	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.0	
	4-SNGA120412	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.2	
	4-SNGA120416	●	●	●	●	●	●	4	Φ12.7	4.76	5.16	1.6	
Multi-tip insert													
	8-SNGA120404	●	●	●	●	●	●	8	Φ12.7	4.76	5.16	0.4	
	8-SNGA120406	●	●	●	●	●	●	8	Φ12.7	4.76	5.16	0.6	
	8-SNGA120408	●	●	●	●	●	●	8	Φ12.7	4.76	5.16	0.8	
	8-SNGA120410	●	●	●	●	●	●	8	Φ12.7	4.76	5.16	1.0	
	8-SNGA120412	●	●	●	●	●	●	8	Φ12.7	4.76	5.16	1.2	
	8-SNGA120416	●	●	●	●	●	●	8	Φ12.7	4.76	5.16	1.6	
Single-tip insert													
	SNGA150604	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	0.4	
	SNGA150608	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	0.8	
	SNGA150610	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	1.0	
	SNGA150612	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	1.2	
	SNGA150616	●	●	●	●	●	●	1	Φ15.875	6.35	6.35	1.6	

SN Square 90°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	2-SNGA150604	●	●	●	●	●	●	2	Φ15.875	6.35	6.35	0.4	
	2-SNGA150608	●	●	●	●	●	●	2	Φ15.875	6.35	6.35	0.8	
	2-SNGA150610	●	●	●	●	●	●	2	Φ15.875	6.35	6.35	1.0	
	2-SNGA150612	●	●	●	●	●	●	2	Φ15.875	6.35	6.35	1.2	
	2-SNGA150616	●	●	●	●	●	●	2	Φ15.875	6.35	6.35	1.6	
Multi-tip insert													
	4-SNGA150604	●	●	●	●	●	●	4	Φ15.875	6.35	6.35	0.4	
	4-SNGA150608	●	●	●	●	●	●	4	Φ15.875	6.35	6.35	0.8	
	4-SNGA150610	●	●	●	●	●	●	4	Φ15.875	6.35	6.35	1.0	
	4-SNGA150612	●	●	●	●	●	●	4	Φ15.875	6.35	6.35	1.2	
	4-SNGA150616	●	●	●	●	●	●	4	Φ15.875	6.35	6.35	1.6	
Multi-tip insert													
	8-SNGA150604	●	●	●	●	●	●	8	Φ15.875	6.35	6.35	0.4	
	8-SNGA150608	●	●	●	●	●	●	8	Φ15.875	6.35	6.35	0.8	
	8-SNGA150610	●	●	●	●	●	●	8	Φ15.875	6.35	6.35	1.0	
	8-SNGA150612	●	●	●	●	●	●	8	Φ15.875	6.35	6.35	1.2	
	8-SNGA150616	●	●	●	●	●	●	8	Φ15.875	6.35	6.35	1.6	
Single-tip insert													
	SNGA190608	●	●	●	●	●	●	1	Φ19.05	6.35	7.94	0.8	
	SNGA190612	●	●	●	●	●	●	1	Φ19.05	6.35	7.94	1.2	
	SNGA190616	●	●	●	●	●	●	1	Φ19.05	6.35	7.94	1.6	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder







Threading

Parting / Grooving











Miniature Tool

SN Square 90°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Multi-tip insert															
	2-SNGA190608	●	●	●	●			●	●	2	Φ19.05	6.35	7.94	0.8	
	2-SNGA190612	●	●	●	●			●	●	2	Φ19.05	6.35	7.94	1.2	
	2-SNGA190616	●	●	●	●			●	●	2	Φ19.05	6.35	7.94	1.6	
Multi-tip insert															
	4-SNGA190608	●	●	●	●			●	●	4	Φ19.05	6.35	7.94	0.8	
	4-SNGA190612	●	●	●	●			●	●	4	Φ19.05	6.35	7.94	1.2	
	4-SNGA190616	●	●	●	●			●	●	4	Φ19.05	6.35	7.94	1.6	
Multi-tip insert															
	8-SNGA190608	●	●	●	●			●	●	8	Φ19.05	6.35	7.94	0.8	
	8-SNGA190612	●	●	●	●			●	●	8	Φ19.05	6.35	7.94	1.2	
	8-SNGA190616	●	●	●	●			●	●	8	Φ19.05	6.35	7.94	1.6	

SC Square 90°
Positive 7°

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	SCGW050202	●	●	●	●			●	●	1	Φ5.56	2.38	2.2	0.2	
	SCGW050204	●	●	●	●			●	●	1	Φ5.56	2.38	2.2	0.4	
Single-tip insert															
	SCGW060202	●	●	●	●			●	●	1	Φ6.35	2.38	2.2	0.2	
	SCGW060204	●	●	●	●			●	●	1	Φ6.35	2.38	2.2	0.4	
	SCGW060208	●	●	●	●			●	●	1	Φ6.35	2.38	2.2	0.8	
Single-tip insert															
	SCGW070202	●	●	●	●			●	●	1	Φ7.94	2.38	3.4	0.2	
	SCGW070204	●	●	●	●			●	●	1	Φ7.94	2.38	3.4	0.4	
	SCGW070206	●	●	●	●			●	●	1	Φ7.94	2.38	3.4	0.6	
	SCGW070208	●	●	●	●			●	●	1	Φ7.94	2.38	3.4	0.8	
Multi-tip insert															
	2-SCGW070202	●	●	●	●			●	●	2	Φ7.94	2.38	3.4	0.2	
	2-SCGW070204	●	●	●	●			●	●	2	Φ7.94	2.38	3.4	0.4	
	2-SCGW070206	●	●	●	●			●	●	2	Φ7.94	2.38	3.4	0.6	
	2-SCGW070208	●	●	●	●			●	●	2	Φ7.94	2.38	3.4	0.8	
Single-tip insert															
	SCGW090302	●	●	●	●			●	●	1	Φ9.525	3.18	4.4	0.2	
	SCGW090304	●	●	●	●			●	●	1	Φ9.525	3.18	4.4	0.4	
	SCGW090306	●	●	●	●			●	●	1	Φ9.525	3.18	4.4	0.6	
	SCGW090308	●	●	●	●			●	●	1	Φ9.525	3.18	4.4	0.8	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder

Treading

Parting / Grooving







Miniature Tool

SC Square 90°
Positive 7°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700							
Multi-tip insert														
	2-SCGW090302	●	●	●	●		●	●	2	Φ9.525	3.18	4.4	0.2	
	2-SCGW090304	●	●	●	●		●	●	2	Φ9.525	3.18	4.4	0.4	
	2-SCGW090306	●	●	●	●		●	●	2	Φ9.525	3.18	4.4	0.6	
	2-SCGW090308	●	●	●	●		●	●	2	Φ9.525	3.18	4.4	0.8	
Multi-tip insert														
	4-SCGW090302	●	●	●	●		●	●	4	Φ9.525	3.18	4.4	0.2	
	4-SCGW090304	●	●	●	●		●	●	4	Φ9.525	3.18	4.4	0.4	
	4-SCGW090306	●	●	●	●		●	●	4	Φ9.525	3.18	4.4	0.6	
	4-SCGW090308	●	●	●	●		●	●	4	Φ9.525	3.18	4.4	0.8	
Single-tip insert														
	SCGW09T302	●	●	●	●		●	●	1	Φ9.525	3.97	4.4	0.2	
	SCGW09T304	●	●	●	●		●	●	1	Φ9.525	3.97	4.4	0.4	
	SCGW09T306	●	●	●	●		●	●	1	Φ9.525	3.97	4.4	0.6	
	SCGW09T308	●	●	●	●		●	●	1	Φ9.525	3.97	4.4	0.8	
Multi-tip insert														
	2-SCGW09T302	●	●	●	●		●	●	2	Φ9.525	3.97	4.4	0.2	
	2-SCGW09T304	●	●	●	●		●	●	2	Φ9.525	3.97	4.4	0.4	
	2-SCGW09T306	●	●	●	●		●	●	2	Φ9.525	3.97	4.4	0.6	
	2-SCGW09T308	●	●	●	●		●	●	2	Φ9.525	3.97	4.4	0.8	
Multi-tip insert														
	4-SCGW09T302	●	●	●	●		●	●	4	Φ9.525	3.97	4.4	0.2	
	4-SCGW09T304	●	●	●	●		●	●	4	Φ9.525	3.97	4.4	0.4	
	4-SCGW09T306	●	●	●	●		●	●	4	Φ9.525	3.97	4.4	0.6	
	4-SCGW09T308	●	●	●	●		●	●	4	Φ9.525	3.97	4.4	0.8	











SC Square 90°
Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700							
Single-tip insert														
	SCGW120404	●	●	●	●		●	●	1	Φ12.7	4.76	5.5	0.4	
	SCGW120406	●	●	●	●		●	●	1	Φ12.7	4.76	5.5	0.6	
	SCGW120408	●	●	●	●		●	●	1	Φ12.7	4.76	5.5	0.8	
	SCGW120410	●	●	●	●		●	●	1	Φ12.7	4.76	5.5	1.0	
	SCGW120412	●	●	●	●		●	●	1	Φ12.7	4.76	5.5	1.2	
Multi-tip insert														
	2-SCGW120404	●	●	●	●		●	●	2	Φ12.7	4.76	5.5	0.4	
	2-SCGW120406	●	●	●	●		●	●	2	Φ12.7	4.76	5.5	0.6	
	2-SCGW120408	●	●	●	●		●	●	2	Φ12.7	4.76	5.5	0.8	
	2-SCGW120410	●	●	●	●		●	●	2	Φ12.7	4.76	5.5	1.0	
	2-SCGW120412	●	●	●	●		●	●	2	Φ12.7	4.76	5.5	1.2	
Multi-tip insert														
	4-SCGW120404	●	●	●	●		●	●	4	Φ12.7	4.76	5.5	0.4	
	4-SCGW120406	●	●	●	●		●	●	4	Φ12.7	4.76	5.5	0.6	
	4-SCGW120408	●	●	●	●		●	●	4	Φ12.7	4.76	5.5	0.8	
	4-SCGW120410	●	●	●	●		●	●	4	Φ12.7	4.76	5.5	1.0	
	4-SCGW120412	●	●	●	●		●	●	4	Φ12.7	4.76	5.5	1.2	











Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

SP Square 90°
Positive 11°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code							Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	SPGW060202	●	●	●	●			●	●	1	Φ6.35	2.38	2.8	0.2	
	SPGW060204	●	●	●	●			●	●	1	Φ6.35	2.38	2.8	0.4	
Single-tip insert															
	SPGW070202	●	●	●	●			●	●	1	Φ7.94	2.38	3.4	0.2	
	SPGW070204	●	●	●	●			●	●	1	Φ7.94	2.38	3.4	0.4	
	SPGW070208	●	●	●	●			●	●	1	Φ7.94	2.38	3.4	0.8	
Single-tip insert															
	SPGW070302	●	●	●	●			●	●	1	Φ7.94	3.18	3.4	0.2	
	SPGW070304	●	●	●	●			●	●	1	Φ7.94	3.18	3.4	0.4	
	SPGW070308	●	●	●	●			●	●	1	Φ7.94	3.18	3.4	0.8	
Single-tip insert															
	SPGW090302	●	●	●	●			●	●	1	Φ9.525	3.18	3.4	0.2	
	SPGW090304	●	●	●	●			●	●	1	Φ9.525	3.18	3.4	0.4	
	SPGW090306	●	●	●	●			●	●	1	Φ9.525	3.18	3.4	0.6	
	SPGW090308	●	●	●	●			●	●	1	Φ9.525	3.18	3.4	0.8	
Multi-tip insert															
	2-SPGW090302	●	●	●	●			●	●	2	Φ9.525	3.18	3.4	0.2	
	2-SPGW090304	●	●	●	●			●	●	2	Φ9.525	3.18	3.4	0.4	
	2-SPGW090306	●	●	●	●			●	●	2	Φ9.525	3.18	3.4	0.6	
	2-SPGW090308	●	●	●	●			●	●	2	Φ9.525	3.18	3.4	0.8	









SP Square 90°
Positive 11°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH1620	TCBK100	TCBX800	TCBS700						
Single-tip insert													
	SPGW09T304	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.4	
	SPGW09T306	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.6	
	SPGW09T308	●	●	●	●	●	●	1	Φ9.525	3.97	4.4	0.8	
Multi-tip insert													
	2-SPGW09T304	●	●	●	●	●	●	2	Φ9.525	3.97	4.4	0.4	
	2-SPGW09T306	●	●	●	●	●	●	2	Φ9.525	3.97	4.4	0.6	
	2-SPGW09T308	●	●	●	●	●	●	2	Φ9.525	3.97	4.4	0.8	
Single-tip insert													
	SPGW120404	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.4	
	SPGW120406	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.6	
	SPGW120408	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	0.8	
	SPGW120410	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	1.0	
	SPGW120412	●	●	●	●	●	●	1	Φ12.7	4.76	5.5	1.2	
Multi-tip insert													
	2-SPGW120404	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	0.4	
	2-SPGW120406	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	0.6	
	2-SPGW120408	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	0.8	
	2-SPGW120410	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	1.0	
	2-SPGW120412	●	●	●	●	●	●	2	Φ12.7	4.76	5.5	1.2	
Multi-tip insert													
	4-SPGW120404	●	●	●	●	●	●	4	Φ12.7	4.76	5.5	0.4	
	4-SPGW120406	●	●	●	●	●	●	4	Φ12.7	4.76	5.5	0.6	
	4-SPGW120408	●	●	●	●	●	●	4	Φ12.7	4.76	5.5	0.8	
	4-SPGW120410	●	●	●	●	●	●	4	Φ12.7	4.76	5.5	1.0	
	4-SPGW120412	●	●	●	●	●	●	4	Φ12.7	4.76	5.5	1.2	



Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

WN Trigon 80°
Negative





Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	WNGA06T302	●	●	●	●			●	●	1	Φ9.525	3.97	3.8	0.2	
	WNGA06T304	●	●	●	●			●	●	1	Φ9.525	3.97	3.8	0.4	
	WNGA06T306	●	●	●	●			●	●	1	Φ9.525	3.97	3.8	0.6	
	WNGA06T308	●	●	●	●			●	●	1	Φ9.525	3.97	3.8	0.8	
Single-tip insert															
	WNGA060404	●	●	●	●			●	●	1	Φ9.525	4.76	3.8	0.4	
	WNGA060406	●	●	●	●			●	●	1	Φ9.525	4.76	3.8	0.6	
	WNGA060408	●	●	●	●			●	●	1	Φ9.525	4.76	3.8	0.8	
Single-tip insert															
	WNGA080404	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	0.4	
	WNGA080406	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	0.6	
	WNGA080408	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	0.8	
	WNGA080410	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	1.0	
	WNGA080412	●	●	●	●			●	●	1	Φ12.7	4.76	5.16	1.2	
Multi-tip insert															
	3-WNGA080404	●	●	●	●			●	●	3	Φ12.7	4.76	5.16	0.4	
	3-WNGA080406	●	●	●	●			●	●	3	Φ12.7	4.76	5.16	0.6	
	3-WNGA080408	●	●	●	●			●	●	3	Φ12.7	4.76	5.16	0.8	
	3-WNGA080410	●	●	●	●			●	●	3	Φ12.7	4.76	5.16	1.0	
	3-WNGA080412	●	●	●	●			●	●	3	Φ12.7	4.76	5.16	1.2	

WN Trigon 80°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCH620	TCBK100	TCBK100	TCBK100							TCBX800
Multi-tip insert														
	6-WNGA080404	●	●	●	●	●	●	●	6	Φ12.7	4.76	5.16	0.4	
	6-WNGA080406	●	●	●	●	●	●	●	6	Φ12.7	4.76	5.16	0.6	
	6-WNGA080408	●	●	●	●	●	●	●	6	Φ12.7	4.76	5.16	0.8	
	6-WNGA080410	●	●	●	●	●	●	●	6	Φ12.7	4.76	5.16	1.0	
	6-WNGA080412	●	●	●	●	●	●	●	6	Φ12.7	4.76	5.16	1.2	









WB Trigon 80°
Positive 5°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCH620	TCBK100	TCBK100	TCBK100							TCBX800
Single-tip insert														
	WBGW060102	●	●	●	●	●	●	●	1	Φ3.97	1.59	2.2	0.2	
	WBGW060104	●	●	●	●	●	●	●	1	Φ3.97	1.59	2.2	0.4	
Single-tip insert														
	WBGW080202	●	●	●	●	●	●	●	1	Φ4.76	2.38	2.4	0.2	
	WBGW080204	●	●	●	●	●	●	●	1	Φ4.76	2.38	2.4	0.4	



Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting / Grooving
Miniature Tool

WC Trigon 80°
Positive 7°



Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	WCGW020102	●	●	●	●			●	●	1	Φ3.97	1.59	2.3	0.2	
	WCGW020104	●	●	●	●			●	●	1	Φ3.97	1.59	2.3	0.4	
Single-tip insert															
	WCGW040202	●	●	●	●			●	●	1	Φ6.35	2.38	2.8	0.2	
	WCGW040204	●	●	●	●			●	●	1	Φ6.35	2.38	2.8	0.4	
Single-tip insert															
	WCGW050302	●	●	●	●			●	●	1	Φ7.94	3.18	3.5	0.2	
	WCGW050304	●	●	●	●			●	●	1	Φ7.94	3.18	3.5	0.4	
	WCGW050308	●	●	●	●			●	●	1	Φ7.94	3.18	3.5	0.8	
Single-tip insert															
	WCGW06T302	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.2	
	WCGW06T304	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.4	
	WCGW06T308	●	●	●	●			●	●	1	Φ9.525	3.97	4.4	0.8	

RC Round Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
	RCGW060200	●	●	●	●	●	●	—	Φ6	2.38	2.8	—	
	RCGW080300	●	●	●	●	●	●	—	Φ8	3.18	3.4	—	
	RCGW100300	●	●	●	●	●	●	—	Φ10	3.18	3.6	—	
	RCGW120400	●	●	●	●	●	●	—	Φ12	4.76	4.2	—	
	RCGW160600	●	●	●	●	●	●	—	Φ16	6.35	5.2	—	

RP Round Positive 11°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
	RPGW080300	●	●	●	●	●	●	—	Φ8	3.18	3.4	—	
	RPGW100400	●	●	●	●	●	●	—	Φ10	4.72	3.6	—	
	RPGW120400	●	●	●	●	●	●	—	Φ12	4.72	4.2	—	
	RPGW160400	●	●	●	●	●	●	—	Φ16	4.72	5.2	—	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder







Threading

Parting, Grooving











Miniature Tool

CN Rhombic 80°
Negative

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700								
Single-tip insert																
	CNGN120404	●	●	●	●			●	●		1	Φ12.7	4.76	—	0.4	
	CNGN120408	●	●	●	●			●	●		1	Φ12.7	4.76	—	0.8	
	CNGN120412	●	●	●	●			●	●		1	Φ12.7	4.76	—	1.2	
Multi-tip insert																
	2-CNGN120404	●	●	●	●			●	●		2	Φ12.7	4.76	—	0.4	
	2-CNGN120408	●	●	●	●			●	●		2	Φ12.7	4.76	—	0.8	
	2-CNGN120412	●	●	●	●			●	●		2	Φ12.7	4.76	—	1.2	
Multi-tip insert																
	4-CNGN120404	●	●	●	●			●	●		4	Φ12.7	4.76	—	0.4	
	4-CNGN120408	●	●	●	●			●	●		4	Φ12.7	4.76	—	0.8	
	4-CNGN120412	●	●	●	●			●	●		4	Φ12.7	4.76	—	1.2	

TN Triangular 60°
Negative

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	TNGN110302	●	●	●	●			●	●	1	Φ6.35	3.18	—	0.2	
	TNGN110304	●	●	●	●			●	●	1	Φ6.35	3.18	—	0.4	
	TNGN110306	●	●	●	●			●	●	1	Φ6.35	3.18	—	0.6	
Single-tip insert															
	TNGN160304	●	●	●	●			●	●	1	Φ9.525	3.18	—	0.4	
	TNGN160308	●	●	●	●			●	●	1	Φ9.525	3.18	—	0.8	
	TNGN160312	●	●	●	●			●	●	1	Φ9.525	3.18	—	1.2	
Multi-tip insert															
	3-TNGN160304	●	●	●	●			●	●	3	Φ9.525	3.18	—	0.4	
	3-TNGN160308	●	●	●	●			●	●	3	Φ9.525	3.18	—	0.8	
	3-TNGN160312	●	●	●	●			●	●	3	Φ9.525	3.18	—	1.2	
Single-tip insert															
	TNGN160404	●	●	●	●			●	●	1	Φ9.525	4.76	—	0.4	
	TNGN160408	●	●	●	●			●	●	1	Φ9.525	4.76	—	0.8	
	TNGN160412	●	●	●	●			●	●	1	Φ9.525	4.76	—	1.2	
	TNGN160416	●	●	●	●			●	●	1	Φ9.525	4.76	—	1.6	
Multi-tip insert															
	3-TNGN160404	●	●	●	●			●	●	3	Φ9.525	4.76	—	0.4	
	3-TNGN160408	●	●	●	●			●	●	3	Φ9.525	4.76	—	0.8	
	3-TNGN160412	●	●	●	●			●	●	3	Φ9.525	4.76	—	1.2	
	3-TNGN160416	●	●	●	●			●	●	3	Φ9.525	4.76	—	1.6	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder



Threading

Parting, Grooving











Miniature Tool

TN Triangular 60°
Negative

- Insert
- External Toolholder
- Internal Toolholder
- PSC Toolholder
- Threading
- Parting , Grooving
- Miniature Tool

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100	TCBX800	TCBS700						
Multi-tip insert													
	6-TNGN160404	●	●	●	●	●	●	6	Φ9.525	4.76	—	0.4	
	6-TNGN160408	●	●	●	●	●	●	6	Φ9.525	4.76	—	0.8	
	6-TNGN160412	●	●	●	●	●	●	6	Φ9.525	4.76	—	1.2	
	6-TNGN160416	●	●	●	●	●	●	6	Φ9.525	4.76	—	1.6	







TP Triangular 60°
Positive 11°

Insert shape	Designation	Material code										Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile	
		TCBH510	TCBH520	TCCH620	TCBK100					TCBX800	TCBS700							
Single-tip insert																		
	TPGN090202	●	●	●	●					●	●		1	Φ5.56	2.38	—	0.2	
	TPGN090204	●	●	●	●					●	●		1	Φ5.56	2.38	—	0.4	
	TPGN090208	●	●	●	●					●	●		1	Φ5.56	2.38	—	0.8	
Single-tip insert																		
	TPGN110302	●	●	●	●					●	●		1	Φ6.35	3.18	—	0.2	
	TPGN110304	●	●	●	●					●	●		1	Φ6.35	3.18	—	0.4	
	TPGN110308	●	●	●	●					●	●		1	Φ6.35	3.18	—	0.8	
Single-tip insert																		
	TPGN160304	●	●	●	●					●	●		1	Φ9.525	3.18	—	0.4	
	TPGN160308	●	●	●	●					●	●		1	Φ9.525	3.18	—	0.8	
	TPGN160312	●	●	●	●					●	●		1	Φ9.525	3.18	—	1.2	
Multi-tip insert																		
	3-TPGN160304	●	●	●	●					●	●		3	Φ9.525	3.18	—	0.4	
	3-TPGN160308	●	●	●	●					●	●		3	Φ9.525	3.18	—	0.8	
	3-TPGN160312	●	●	●	●					●	●		3	Φ9.525	3.18	—	1.2	
Single-tip insert																		
	TPGN160404	●	●	●	●					●	●		1	Φ9.525	4.76	—	0.4	
	TPGN160408	●	●	●	●					●	●		1	Φ9.525	4.76	—	0.8	
	TPGN160412	●	●	●	●					●	●		1	Φ9.525	4.76	—	1.2	
	TPGN160416	●	●	●	●					●	●		1	Φ9.525	4.76	—	1.6	













Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting / Grooving
Miniature Tool

TP Triangular 60°
Positive 11°

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Multi-tip insert															
	3-TPGN160404	●	●	●	●			●	●	3	Φ9.525	4.76	—	0.4	
	3-TPGN160408	●	●	●	●			●	●	3	Φ9.525	4.76	—	0.8	
	3-TPGN160412	●	●	●	●			●	●	3	Φ9.525	4.76	—	1.2	
	3-TPGN160416	●	●	●	●			●	●	3	Φ9.525	4.76	—	1.6	
Single-tip insert															
	TPGN220408	●	●	●	●			●	●	1	Φ12.7	4.76	—	0.8	
	TPGN220412	●	●	●	●			●	●	1	Φ12.7	4.76	—	1.2	
	TPGN220416	●	●	●	●			●	●	1	Φ12.7	4.76	—	1.6	
Multi-tip insert															
	3-TPGN220408	●	●	●	●			●	●	3	Φ12.7	4.76	—	0.8	
	3-TPGN220412	●	●	●	●			●	●	3	Φ12.7	4.76	—	1.2	
	3-TPGN220416	●	●	●	●			●	●	3	Φ12.7	4.76	—	1.6	

SN Square 90°
Negative

Insert shape	Designation	Material code								Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TCBH510	TCBH520	TCCH620	TCBK100		TCBX800	TCBS700							
Single-tip insert															
	SNGN090302	●	●	●	●			●	●	1	Φ9.525	3.18	—	0.2	
	SNGN090304	●	●	●	●			●	●	1	Φ9.525	3.18	—	0.4	
	SNGN090308	●	●	●	●			●	●	1	Φ9.525	3.18	—	0.8	
Multi-tip insert															
	2-SNGN090302	●	●	●	●			●	●	2	Φ9.525	3.18	—	0.2	
	2-SNGN090304	●	●	●	●			●	●	2	Φ9.525	3.18	—	0.4	
	2-SNGN090308	●	●	●	●			●	●	2	Φ9.525	3.18	—	0.8	
Single-tip insert															
	SNGN120404	●	●	●	●			●	●	1	Φ12.7	4.76	—	0.4	
	SNGN120408	●	●	●	●			●	●	1	Φ12.7	4.76	—	0.8	
	SNGN120412	●	●	●	●			●	●	1	Φ12.7	4.76	—	1.2	
Multi-tip insert															
	2-SNGN120404	●	●	●	●			●	●	2	Φ12.7	4.76	—	0.4	
	2-SNGN120408	●	●	●	●			●	●	2	Φ12.7	4.76	—	0.8	
	2-SNGN120412	●	●	●	●			●	●	2	Φ12.7	4.76	—	1.2	
Multi-tip insert															
	4-SNGN120404	●	●	●	●			●	●	4	Φ12.7	4.76	—	0.4	
	4-SNGN120408	●	●	●	●			●	●	4	Φ12.7	4.76	—	0.8	
	4-SNGN120412	●	●	●	●			●	●	4	Φ12.7	4.76	—	1.2	
Multi-tip insert															
	8-SNGN120404	●	●	●	●			●	●	8	Φ12.7	4.76	—	0.4	
	8-SNGN120408	●	●	●	●			●	●	8	Φ12.7	4.76	—	0.8	
	8-SNGN120412	●	●	●	●			●	●	8	Φ12.7	4.76	—	1.2	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder

Threading

Parting, Grooving

Miniature Tool

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting , Grooving
Miniature Tool


Solid type

- Monolithic sintering structure, no strength and internal stress defects caused by welding.
- Suitable for rough machining occasions with large cutting depth and heavy cutting.



Strong welding type

- Ultra high welding strength is suitable for harsh cutting environment with long life and safety requirements.



Material Introduction

	Grade	Work Material	Features	Application
Uncoated	TBN7000	Hardened Steel Hardened Cast Iron	Excellent overall performance with universal application. Excellent wear resistance.	Semi-Finishing Finishing
	TBN9500 H	Hardened Steel	Exhibiting wear and fracture resistance in cutting of hardened steel.	Finishing
	TBS7000	Hardened Steel Hardened Cast Iron	Excellent overall performance with universal application. Excellent wear resistance.	Finishing
	TBN7200	K Grey Cast Iron	Exhibiting improved wear and fracture resistance in cutting of Grey Cast Iron.	Heavy cutting
	TBS7200			Finishing
	TBN3500 S	High Nickel Chrome High Hardness Alloy Cast Iron High Manganese Steel	Excellent impact resistance and wear resistance.	Heavy cutting

CN Rhombic 80°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	CNMN120404	●	●	●	●	●	●	4	Φ12.7	4.76	—	0.4	
	CNMN120408	●	●	●	●	●	●	4	Φ12.7	4.76	—	0.8	
	CNMN120412	●	●	●	●	●	●	4	Φ12.7	4.76	—	1.2	
	CNGA120404-4T			●	●	●	●	4	Φ12.7	4.76	5.16	0.4	
	CNGA120408-4T			●	●	●	●	4	Φ12.7	4.76	5.16	0.8	
	CNGA120412-4T			●	●	●	●	4	Φ12.7	4.76	5.16	1.2	
	CNGA160404-4T			●	●	●	●	4	Φ15.875	6.35	6.35	0.4	
	CNGA160408-4T			●	●	●	●	4	Φ15.875	6.35	6.35	0.8	
	CNGA160412-4T			●	●	●	●	4	Φ15.875	6.35	6.35	1.2	

SN Square 90°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	SNMN090304	●	●	●	●	●	●	8	Φ9.525	3.18	—	0.4	
	SNMN090308	●	●	●	●	●	●	8	Φ9.525	3.18	—	0.8	
	SNMN090312	●	●	●	●	●	●	8	Φ9.525	3.18	—	1.2	
	SNMN120404	●	●	●	●	●	●	8	Φ12.7	4.76	—	0.4	
	SNMN120408	●	●	●	●	●	●	8	Φ12.7	4.76	—	0.8	
	SNGA120404-8T			●	●	●	●	8	Φ12.7	4.76	5.16	0.4	
	SNGA120408-8T			●	●	●	●	8	Φ12.7	4.76	5.16	0.8	
	SNGA120412-8T			●	●	●	●	8	Φ12.7	4.76	5.16	1.2	

Insert

External Toolholder

Internal Toolholder





PSC Toolholder

Threading



Parting / Grooving

Miniature Tool





TN Triangular 60°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	TNGN110304	●	●	●	●	●	●	6	Φ6.35	3.18	—	0.4	
	TNGN110308	●	●	●	●	●	●	6	Φ6.35	3.18	—	0.8	
	TNGN110312	●	●	●	●	●	●	6	Φ6.35	3.18	—	1.2	
	TNGN160404	●	●	●	●	●	●	6	Φ9.525	4.76	—	0.4	
	TNGN160408	●	●	●	●	●	●	6	Φ9.525	4.76	—	0.8	
	TNGN160412	●	●	●	●	●	●	6	Φ9.525	4.76	—	1.2	
	TNGA160404-6T	●	●	●	●	●	●	6	Φ9.525	4.76	3.8	0.4	
	TNGA160408-6T	●	●	●	●	●	●	6	Φ9.525	4.76	3.8	0.8	
	TNGA160412-6T	●	●	●	●	●	●	6	Φ9.525	4.76	3.8	1.2	



RN Round
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	RNMN090300	●	●	●	●	●	●	—	Φ9.525	3.18	—	—	
	RNMN120400	●	●	●	●	●	●	—	Φ12.7	4.76	—	—	
	RNGN090300	●	●	●	●	●	●	—	Φ9.525	3.18	—	—	
	RNGN120400	●	●	●	●	●	●	—	Φ12.7	4.76	—	—	

WN Trigon 80°
Negative

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	WNMN080404	●	●		●	●	●	6	Φ12.7	4.76	—	0.4	
	WNMN080408	●	●		●	●	●	6	Φ12.7	4.76	—	0.8	
	WNMN080412	●	●		●	●	●	6	Φ12.7	4.76	—	1.2	
	WNGA080404-6T			●	●			6	Φ12.7	4.76	5.16	0.4	
	WNGA080408-6T			●	●			6	Φ12.7	4.76	5.16	0.8	
	WNGA080412-6T			●	●			6	Φ12.7	4.76	5.16	1.2	

CC Rhombic 80°
Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	CCGW09T304-2T			●	●			2	Φ9.525	3.97	4.4	0.4	
	CCGW09T308-2T			●	●			2	Φ9.525	3.97	4.4	0.8	
	CCGW09T312-2T			●	●			2	Φ9.525	3.97	4.4	1.2	
	CCGW120404-2T			●	●			2	Φ12.7	4.76	5.5	0.4	
	CCGW120408-2T			●	●			2	Φ12.7	4.76	5.5	0.8	
	CCGW120412-2T			●	●			2	Φ12.7	4.76	5.5	1.2	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder



Threading

Parting / Grooving



Miniature Tool

Insert
External Toolholder
Internal Toolholder
PSC Toolholder
Threading
Parting, Grooving
Miniature Tool



DC Rhombic 55°
Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	DCGW11T304-2T			●	●			2	Φ9.525	3.97	4.4	0.4	
	DCGW11T308-2T			●	●			2	Φ9.525	3.97	4.4	0.8	
	DCGW11T312-2T			●	●			2	Φ9.525	3.97	4.4	1.2	



TC Triangular 60°
Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	TCGW110304-3T			●	●			3	Φ6.35	3.18	2.8	0.4	
	TCGW110308-3T			●	●			3	Φ6.35	3.18	2.8	0.8	
	TCGW110312-3T			●	●			3	Φ6.35	3.18	2.8	1.2	

VB Rhombic 35°
Positive 5°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	VBGW160404-2T			●	●			2	Φ9.525	4.76	4.4	0.4	
	VBGW160408-2T			●	●			2	Φ9.525	4.76	4.4	0.8	
	VBGW160412-2T			●	●			2	Φ9.525	4.76	4.4	1.2	

VC Rhombic 35°
Positive 7°

Insert shape	Designation	Material code						Number of tips	Inscribed circle (Φd)	Thickness (s)	Inner hole diameter (Φd1)	Radius (r)	Insert profile
		TBN7000	TBN9500	TBS7000	TBN7200	TBS7200	TBN3500						
Multi-tip insert													
	VCGW160404-2T			●	●			2	Φ9.525	4.76	4.4	0.4	
	VCGW160408-2T			●	●			2	Φ9.525	4.76	4.4	0.8	
	VCGW160412-2T			●	●			2	Φ9.525	4.76	4.4	1.2	

Insert

External Toolholder

Internal Toolholder

PSC Toolholder








Threading

Parting, Grooving

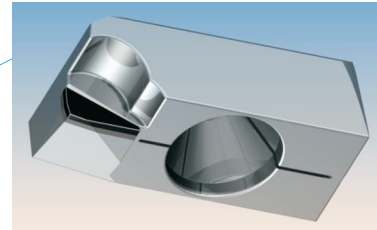

Miniature Tool

Insert
 External Toolholder
 Internal Toolholder
 PSC Toolholder
 Threading
 Parting, Grooving
 Miniature Tool

CBN ballnose tool CV joint machining tool introduction

	Straight shank	No air coolant hole	Maching position: Ball track
			
	RTS shank	Air coolant hole	
			

Auto parts face milling Milling cutter and cartridge



- App : Face milling
- Feature : Cartridge can be adjusted.

Non standard scheme design Cylinder block cutting tool

